



SPORTON LAB.

Certificate No: EH232843

CERTIFICATE



● **EQUIPMENT : 802.11abgn, USB module**
MODEL NO. : WUBR-508N

APPLICANT : SparkLAN Communications, Inc.

8F., No. 257, Sec. 2, Tiding Blvd., Neihu District,
Taipei City 11493, Taiwan



I HEREBY

CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in **EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.1.1 (2009-05)**. Testing was carried out on **Apr. 10, 2012** at SPORTON International Inc. LAB.

Wayne Hsu
Assistant Manager



CE EMC TEST REPORT

According to

EN 301 489-1 V1.9.2 (2011-09)
EN 301 489-17 V2.1.1 (2009-05)

Equipment : 802.11abgn, USB module
Brand Name : SparkLAN
Model No. : WUBR-508N
Filing Type : New Application
Applicant : SparkLAN Communications, Inc.
Manufacturer : 8F., No. 257, Sec. 2, Tiding Blvd., Neihu District,
Taipei City 11493, Taiwan
Received Date : Mar. 29, 2012
Final Test Date : May 14, 2012

Statement

Test result included in this report is only for printed antenna of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1 SUMMARY OF THE TEST RESULT	2
1.1 Emission Tests.....	2
1.2 Immunity Tests.....	2
1.3 Uncertainty	2
1.4 EMS Performance Criteria Description	3
2 GENERAL INFORMATION.....	4
2.1 Product Details.....	4
2.2 Table for Testing Locations.....	4
2.3 Table for Supporting Units	4
2.4 EUT Operation during Test	4
2.5 Test Configurations	5
3 EMISSION TESTS RESULT	6
3.1 AC Power Line Conducted Emissions Measurement	6
3.2 Telecommunication Line Conducted Emissions Measurement	10
3.3 Radiated Emissions Measurement	13
3.4 Harmonic Current Emissions Measurement	24
3.5 Voltage Fluctuation and Flicker Measurement.....	25
4 IMMUNITY TESTS RESULT	26
4.1 Electrostatic Discharge Immunity Measurement (ESD).....	26
4.2 Radio Frequency Electromagnetic Field Immunity Measurement (RS).....	29
4.3 Electrical Fast Transient/Burst Immunity Measurement (EFT)	32
4.4 Surge Immunity Measurement (Surge).....	34
4.5 Conducted Disturbances Induced by RF Field Immunity Measurement (CS)	36
4.6 Voltage Dips and Voltage Interruption Immunity Measurement (DIP).....	37
5 LIST OF MEASURING EQUIPMENTS.....	38
6 TEST LOCATION.....	40
7 TAF CERTIFICATE OF ACCREDITATION.....	41
APPENDIX A. TEST PHOTOS	A7
APPENDIX B. PHOTOGRAPHS OF EUT	B11



History of This Test Report

Original Issue Date: May 15, 2012

Report No.: EH232843

■ No additional attachment.

□ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description




CERTIFICATE OF COMPLIANCE

According to

EN 301 489-1 V1.9.2 (2011-09)
EN 301 489-17 V2.1.1 (2009-05)

Equipment : 802.11abgn, USB module
Brand Name : SparkLAN
Model No. : WUBR-508N
Applicant : SparkLAN Communications, Inc.
8F., No. 257, Sec. 2, Tiding Blvd., Neihu District,
Taipei City 11493, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 29, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

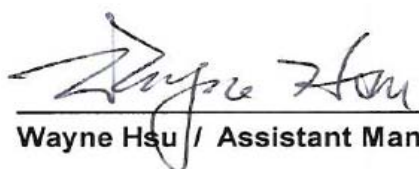
Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

1.1 Emission Tests

Applicable Standard : EN 301 489-1 V1.9.2 (2011-09)				
Part	Test Standard	Description of Test	Result	Under Limit
3.1	EN 55022:2010 Class B	AC Power Conducted Emissions	Complies	17.53 dB
3.2	EN 55022:2010 Class B	Telecom Line Conducted Emissions	-	-
3.3	EN 55022:2010 Class B	Radiated Emissions (Below 1GHz)	Complies	6.31 dB
		Radiated Emissions (Above 1GHz)	Complies	14.23 dB
3.4	EN 61000-3-2:2006/A1:2009/A2:2009	Harmonic Current Emissions	-	-
3.5	EN 61000-3-3:2008	Voltage Fluctuations and Flicker	-	-

1.2 Immunity Tests

Applicable Standard : EN 301 489-1 V1.9.2 (2011-09)				
Part	Test Standard	Description of Test	Result	Criteria
4.1	EN 61000-4-2:2009	ESD (EUT of Enclosure)	Complies	B
4.2	EN 61000-4-3:2006/A1:2007/A2:2010	RS (EUT of Enclosure)	Complies	A
-	EN 61000-4-4:2004/A1:2010	EFT (EUT of AC Power Port)	-	-
-	EN 61000-4-4:2004/A1:2010	EFT (EUT of Telecom Port)	-	-
-	EN 61000-4-5:2006	Surge (EUT of AC Power Port)	-	-
-	EN 61000-4-5:2006	Surge (EUT of Telecom Port)	-	-
-	EN 61000-4-6:2009	CS (EUT of AC Power Port)	-	-
-	EN 61000-4-6:2009	CS (EUT of Telecom Port)	-	-
-	EN 61000-4-11:2004	DIP (EUT of AC Power Port)	-	-

1.3 Uncertainty

Test Items	Test Site No.	Uncertainty	Remark
Conducted Emissions	CO01-HY	± 2.26 dB	Confidence levels of 95%
Radiated Emissions below 1GHz	10CH01-HY	± 2.82 dB	Confidence levels of 95%
Radiated Emissions above 1GHz	10CH02-HY	± 4.87 dB	Confidence levels of 95%



1.4 EMS Performance Criteria Description

Criteria	During test	After test
A	Shall operate as intended. May show degradation of performance (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 2). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2).

NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance.
If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

2 GENERAL INFORMATION

2.1 Product Details

There are three types of the EUT. The difference between these three types is connector; we chose the full function type to test. The equipment is 802.11abgn, USB module. For more detailed features description, please refer to the specifications or user's manual.

2.2 Table for Testing Locations

Test Site No.	Site Category	Location	Test Site No.	Site Category	Location
CO01-HY	Conduction	Hwa Ya	ES01-HY	ESD	Hwa Ya
10CH01-HY (Below 1 GHz)	SAC	Hwa Ya	RS01-HY	RS	Hwa Ya
10CH02-HY (Above 1GHz)	SAC	Hwa Ya	--	--	--

Semi Anechoic Chamber (SAC).

2.3 Table for Supporting Units

EMI

Support Unit	Brand	Model	FCC ID
Notebook	DELL	VOSTRO 3350	DoC
(USB) Mouse	Microsoft	1113	JNZ211443
iPod nano	Apple	A1199	N/A
Wireless AP (Remote Workstation)	D-Link	DNS-G120	DoC

EMS

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP01L	DoC
Wireless AP (Remote Workstation)	SIEMENS	SE366	N/A


2.4 EUT Operation during Test

Two executive programs, "EMITEST.exe" and "EMCTEST.exe" under Win XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

- Turn on the power of all equipment.
- The NB executed "Winthrax.exe" to read/write data from EUT.
- The NB executed " EMITEST.exe " sends "H" messages to the panel and displays "H" patterns on the screen.
- The EUT connect to remote workstation (Wireless AP) via WiFi.

2.5 Test Configurations

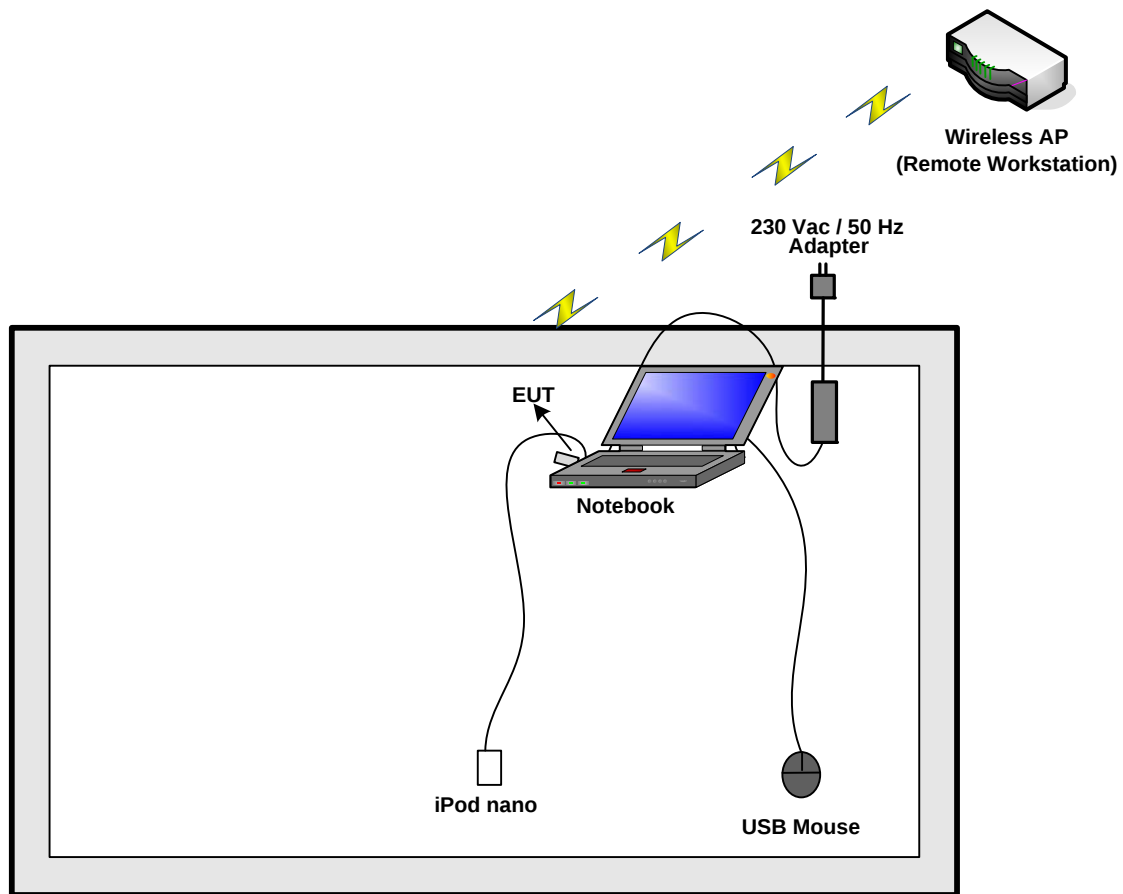



3 EMISSION TESTS RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connect to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.4 Typical Test Setup Layout of Conducted Powerline

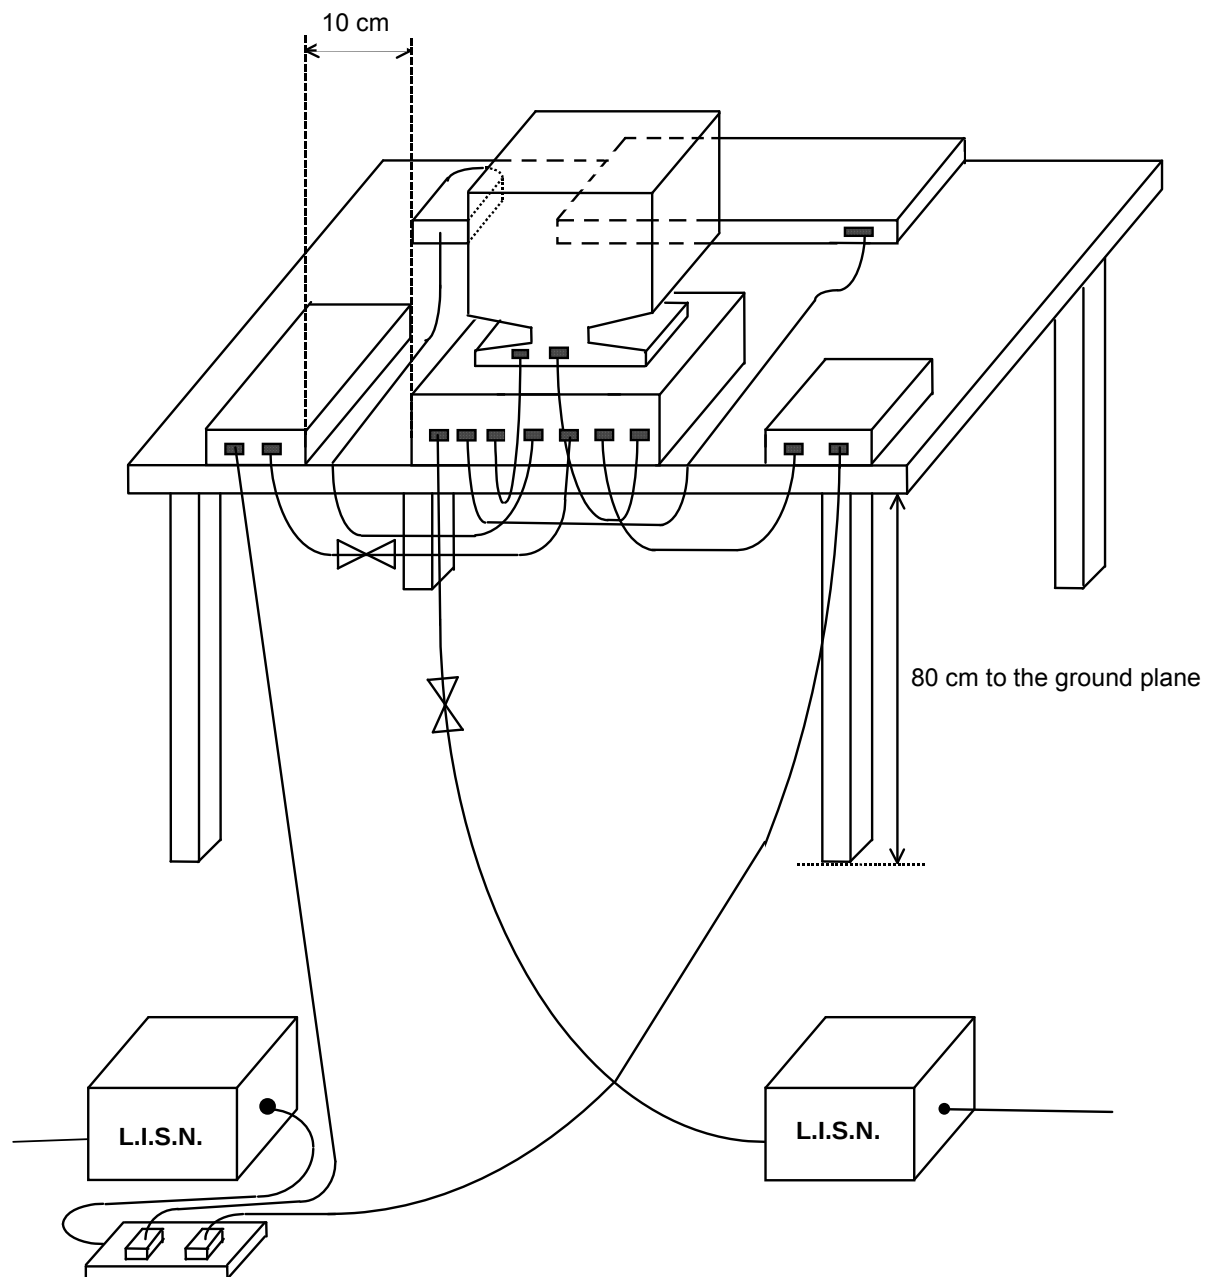




3.1.5 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	May 14, 2012	Test Site No.	CO01-HY
Temperature	23.6°C	Humidity	49%
Test Engineer	Ston	Configuration	System Mode


Line

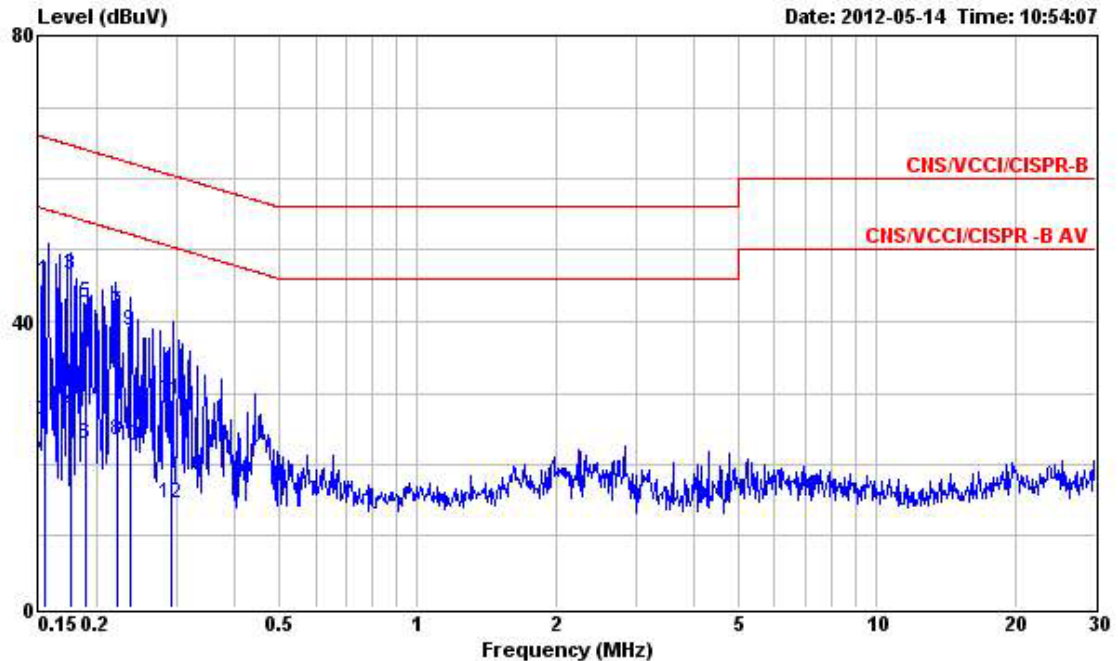

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	45.80	-19.94	65.74	45.62	0.08	0.10	QP
2	0.155	26.33	-29.41	55.74	26.15	0.08	0.10	Average
3	0.176	46.51	-18.16	64.67	46.33	0.08	0.10	QP
4	0.176	27.36	-27.31	54.67	27.18	0.08	0.10	Average
5	0.190	42.71	-21.32	64.03	42.53	0.08	0.10	QP
6	0.190	22.92	-31.11	54.03	22.74	0.08	0.10	Average
7	0.221	41.29	-21.49	62.78	41.11	0.08	0.10	QP
8	0.221	23.50	-29.28	52.78	23.32	0.08	0.10	Average
9	0.237	38.63	-23.57	62.20	38.45	0.08	0.10	QP
10	0.237	22.56	-29.64	52.20	22.38	0.08	0.10	Average
11	0.292	29.19	-31.28	60.47	29.00	0.09	0.10	QP
12	0.292	14.49	-35.98	50.47	14.30	0.09	0.10	Average



Neutral

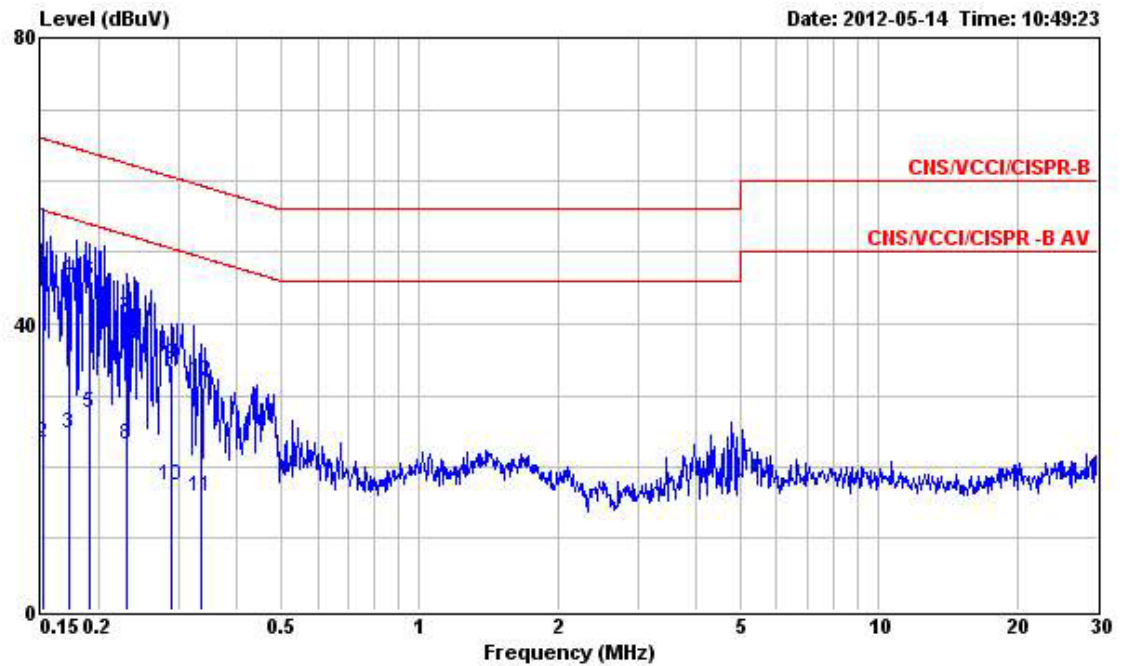

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	48.39	-17.53	65.92	48.22	0.07	0.10	QP
2	0.151	23.29	-32.63	55.92	23.12	0.07	0.10	Average
3	0.173	24.69	-30.14	54.83	24.53	0.06	0.10	Average
4	0.173	46.33	-18.50	64.83	46.17	0.06	0.10	QP
5	0.191	27.57	-26.42	53.99	27.41	0.06	0.10	Average
6	0.191	46.00	-17.99	63.99	45.84	0.06	0.10	QP
7	0.230	40.73	-21.72	62.45	40.57	0.06	0.10	QP
8	0.230	23.11	-29.34	52.45	22.95	0.06	0.10	Average
9	0.289	34.18	-26.36	60.54	34.01	0.07	0.10	QP
10	0.289	17.31	-33.23	50.54	17.14	0.07	0.10	Average
11	0.334	15.86	-33.49	49.35	15.69	0.07	0.10	Average
12	0.334	32.01	-27.34	59.35	31.84	0.07	0.10	QP

Note:

Level = Read Level + Probe Factor + Cable Loss.

3.2 Telecommunication Line Conducted Emissions Measurement

3.2.1 Limit

For a device, which is designed to be connected to the telecommunication line, the radio frequency voltage that is conducted back onto the telecommunication line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	Voltage		Current	
	QP Limit (dBuV)	AV Limit (dBuV)	QP Limit (dBuA)	AV Limit (dBuA)
0.15~0.5	84~74	74~64	40~30	30~20
0.5~30	74	64	30	20

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of Equipment's list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2.3 Test Procedures

1. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect telecommunication line of EUT to the associated equipment through a impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done different categories of telecommunication lines.

3.2.4 Typical Test Setup Layout of Telecommunication Ports

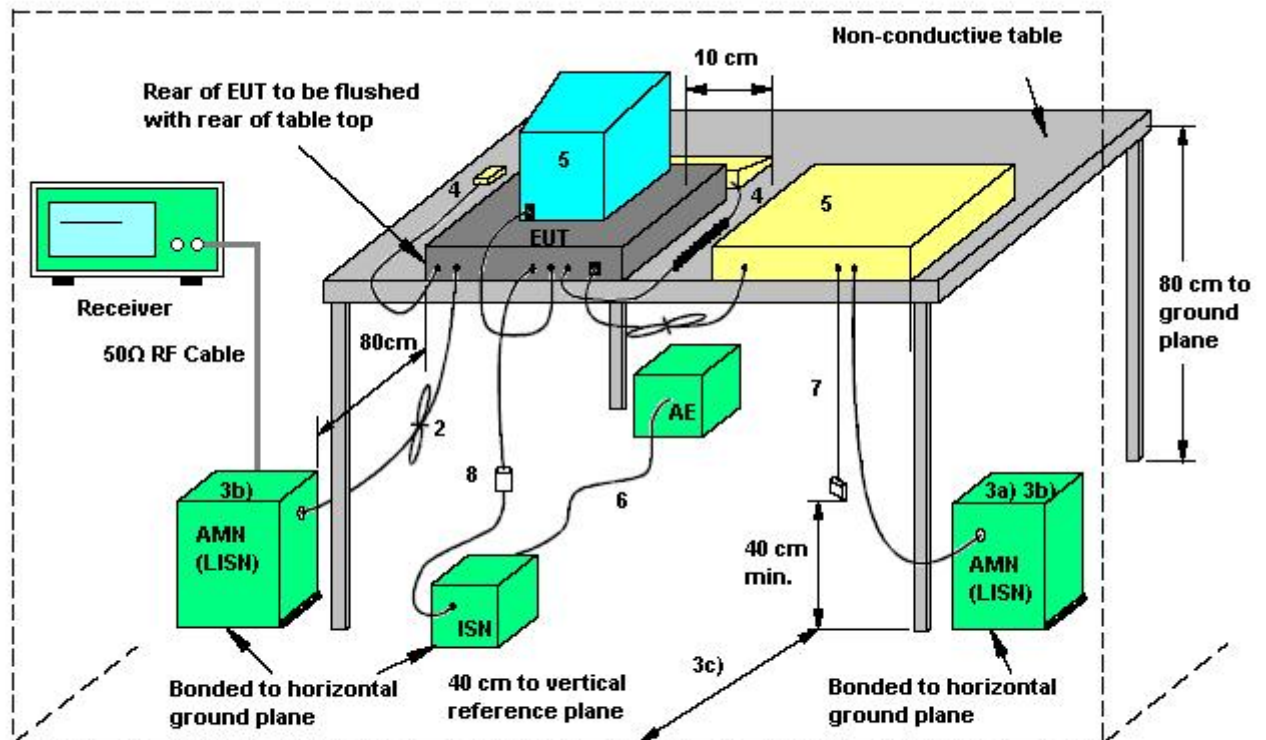

AMN = Artificial mains network (LISN)
 AE = Associated equipment
 EUT = Equipment under test
 ISN = Impedance stabilization network

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
 - a. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
 - b. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
 - c. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
4. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
5. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
6. I/O signal cable intended for external connection.
7. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
8. If used, the current probe shall be placed at 0,1 m from the ISN.



3.2.5 Test Result for Telecommunication Line Conducted Emissions Measurement

The test item needn't to be performed due to the EUT without telecommunication port.

3.3 Radiated Emissions Measurement

3.3.1 Limit

Radiated emissions below 1 GHz were measured with a bandwidth of 120 kHz for 30 MHz to 1,000 MHz and bandwidth of 1 MHz for above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6GHz (The highest frequency of the internal source of EUT is 2472 MHz from Radio, the measurement shall be made to 6 GHz.), whichever is lower. The quasi-peak measuring receiver shall be in accordance with clause 2 of EN55016-1. Receivers with peak detectors shall be in accordance with clause 3 of EN55016-1, and shall have a 6 dB bandwidth in accordance with clause 2 of EN55016-1 and above 1GHz measurement method shall be as specified in 7.3 of EN55016-2-3.

< Limit: Below 1GHz >

Frequency of Emission (MHz)	Field Strength QP Limit (dBuV/m) at 10m
30 ~ 230	30
230 ~ 1000	37

< Limit: Above 1GHz >

Frequency of Emission (GHz)	Field Strength Limit (dBuV/m) at 3m	
	Average	Peak
1 ~ 3	50	70
3 ~ 6	54	74

3.3.2 Measuring Instruments and Setting

Please refer to section 4 of Equipment's list in this report. The following table is the setting of the spectrum analyzer.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP
Start ~ Stop Frequency	1GHz~6GHz / 1MHz for Peak, Average

3.3.3 Test Procedures

< Below 1GHz >


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

< Above 1GHz >


- a. The EUT was placed on a turntable at the height of 0.8 meters from the ground.
- b. The EUT was set at a distance of 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. An absorber was placed between the EUT and Antenna as required per the CISPR16-1-14 standard, specifically, the measurement setup requirements defined for an accredited test site.
- d. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. Set the measuring receiver system to "Peak Detection" function and "Specified Bandwidth" with the "Maximum Hold" mode set on the measuring receiver.
- f. The DRG Horn Antenna (Model: 3115) was set at a height of 1 meter while turning the turntable to obtain the EUT's most maximized operational radiation noise readings from both the "Horizontal" and "Vertical" polarizations separately.
- g. When an EUT is located on the turntable, and its height is over 172cm (when the antenna's 3dB beam width of 6GHz is at 27°), the DRG Horn Antenna must be raised and descended while turning the turntable to obtain the EUT's most maximized operational radiation noise readings from both the "Horizontal" and "Vertical" polarizations separately.
NOTE: The maximum raise height of the antenna is the same height as that of the top of the EUT while located on top of the turntable.
- h. If the emission level of the EUT in "Peak Detection" mode is 20dB lower than the "Average" limit (means that the emission level in "Peak Detection" mode also complies with the limit in "Average Mode"), testing will be stopped and "Peak" values of the EUT will be reported, otherwise, the emissions of the EUT will be measured in "Average Mode" again and then reported.

3.3.4 Test Setup Layout

< Below 1GHz >

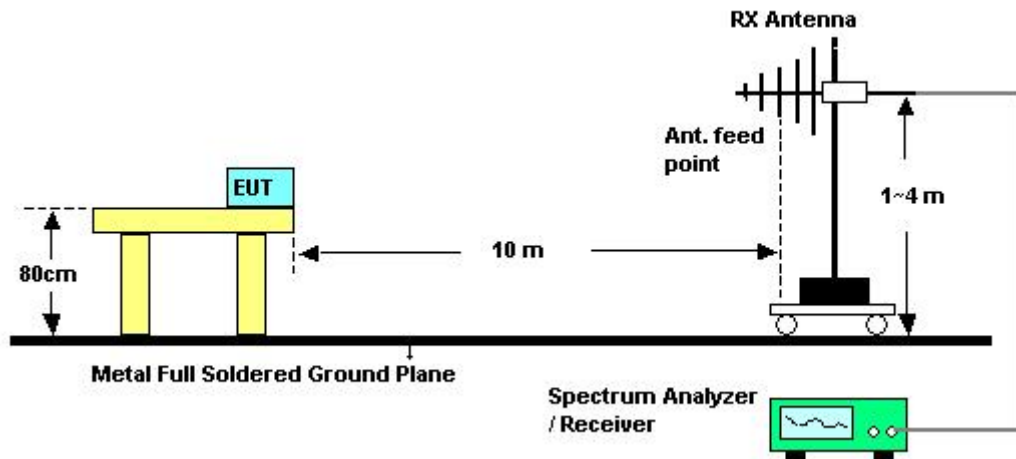

< Above 1GHz >

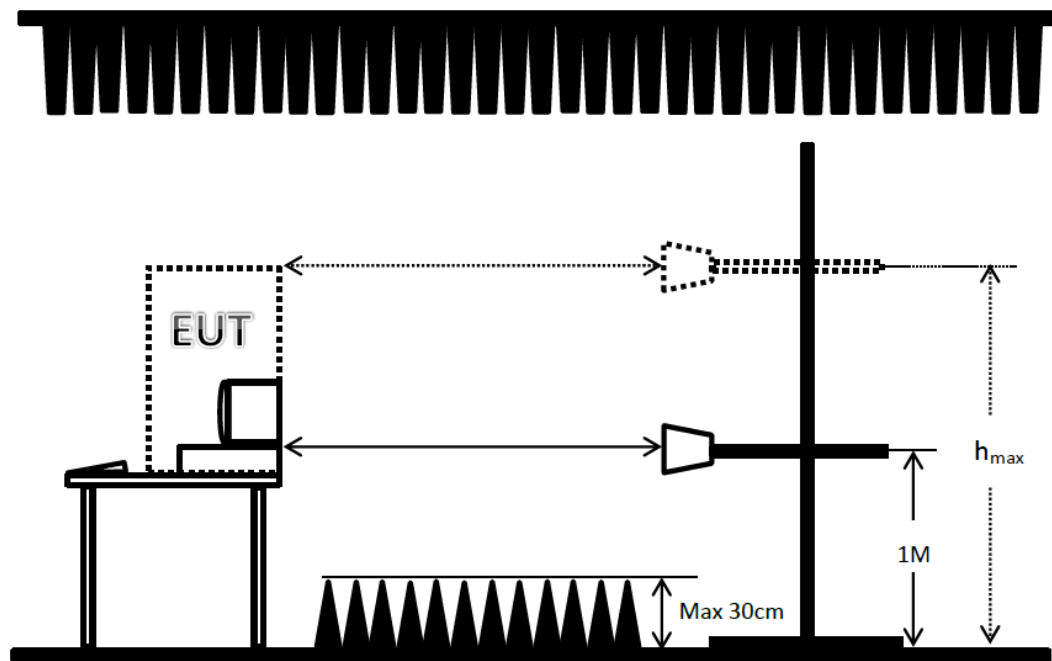


Remark: When EUT's height is over 172cm, h_{max} = top of EUT




3.3.5 Results for Radiated Emissions (30MHz~1GHz)

Final Test Date	May 14, 2012	Test Site No.	10CH01-HY
Temperature	24°C	Humidity	57%
Test Engineer	Nigel	Configuration	System Mode

Horizontal

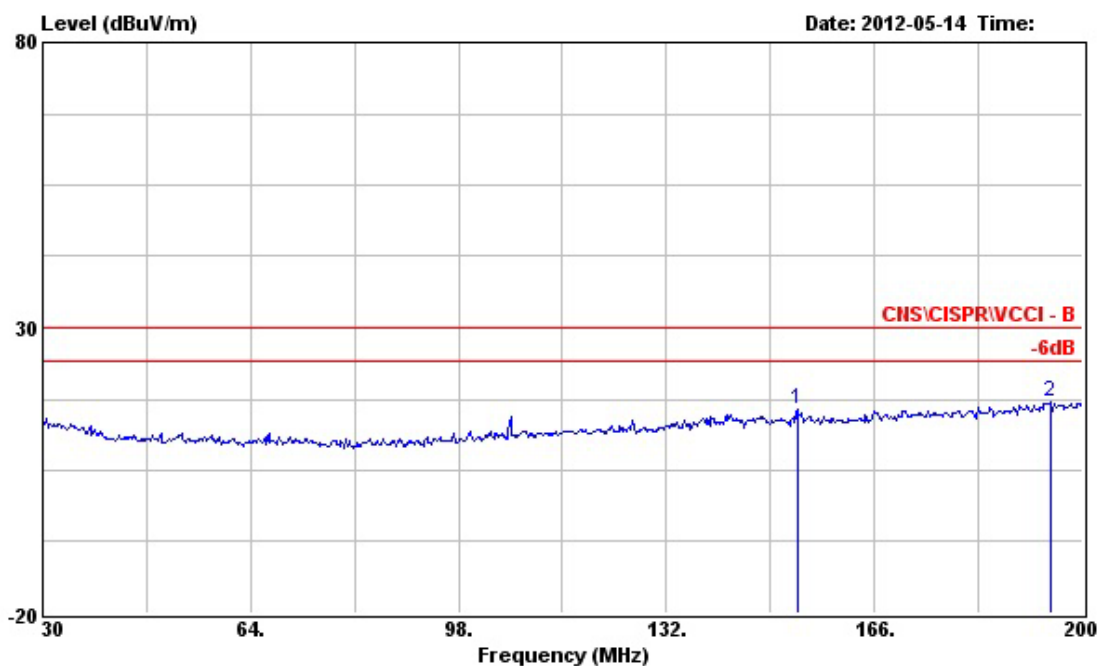


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	153.420	15.77	-14.23	30.00	28.86	2.88	12.20	28.17	Peak	---	---
2	194.900	16.90	-13.10	30.00	27.55	3.34	13.97	27.96	Peak	---	---

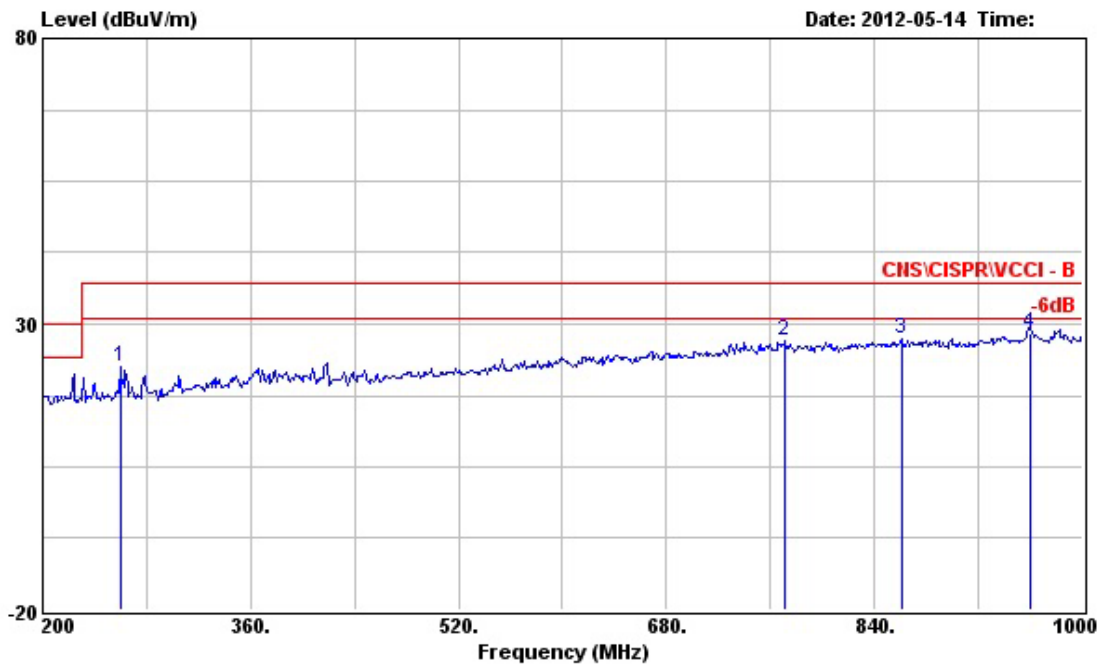


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	260.000	22.60	-14.40	37.00	33.64	4.14	12.14	27.32	Peak	---	---
2	771.200	27.11	-9.89	37.00	27.06	7.35	20.65	27.95	Peak	---	---
3	860.800	27.47	-9.53	37.00	26.37	7.76	20.96	27.62	Peak	---	---
4	960.000	28.34	-8.66	37.00	25.09	8.85	21.62	27.22	QP	100	244



Vertical

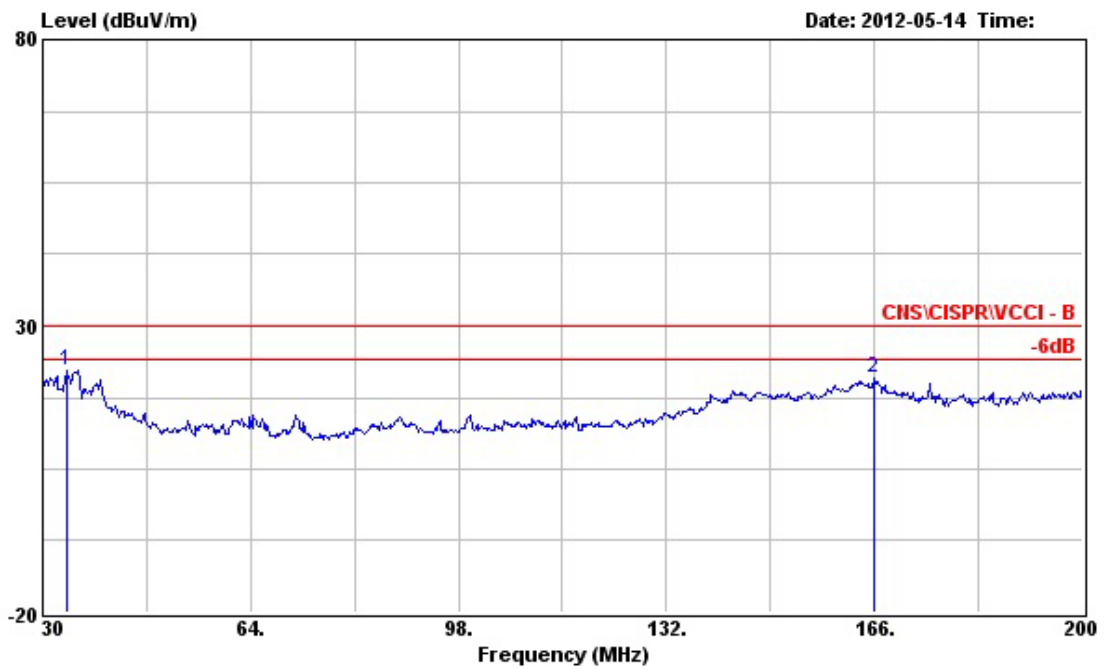

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	33.910	22.27	-7.73	30.00	36.75	1.30	12.83	28.61	Peak	---	---
2	165.830	21.00	-9.00	30.00	33.58	2.90	12.63	28.11	Peak	---	---

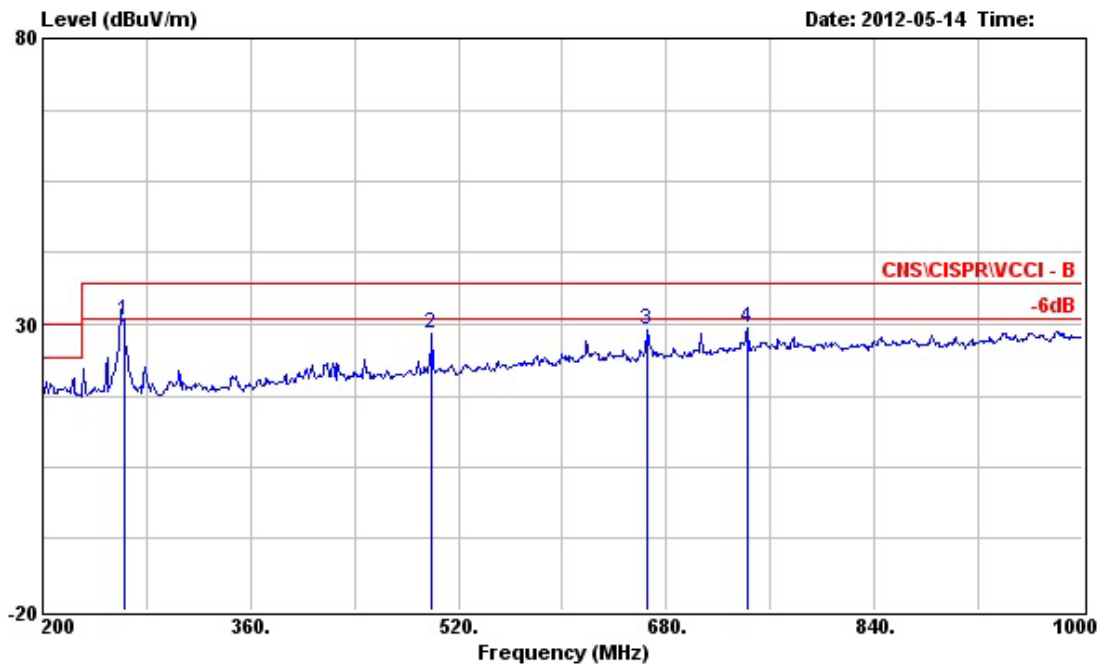

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	262.400	30.69	-6.31	37.00	41.67	4.15	12.18	27.31	QP	100	165
2	499.200	28.36	-8.64	37.00	33.57	5.76	17.35	28.32	Peak	---	---
3	665.600	29.13	-7.87	37.00	30.83	6.85	19.67	28.22	Peak	---	---
4	742.400	29.35	-7.65	37.00	29.89	7.09	20.41	28.04	Peak	---	---


Note: Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level.
V: Vertical Polarization ; H: Horizontal Polarization.




3.3.6 Results for Radiated Emissions (1GHz to 6GHz)

Final Test Date	May 14, 2012	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Assen	Configuration	System Mode

Horizontal

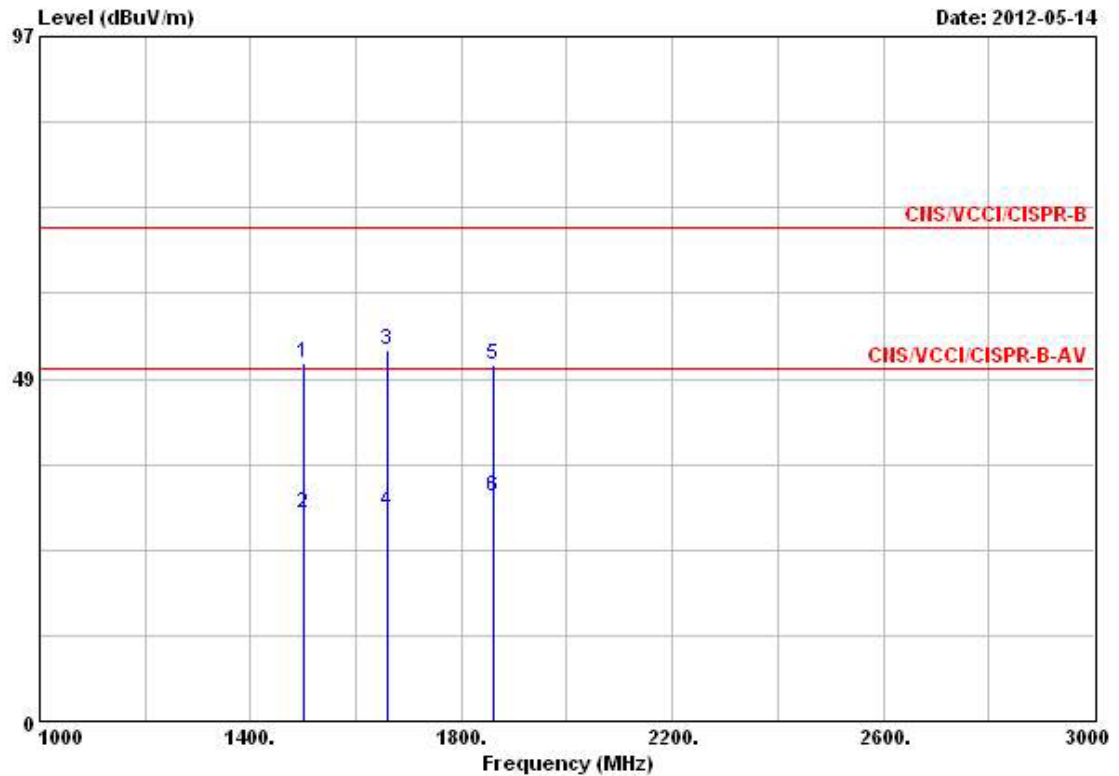


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1500.000	50.73	-19.27	70.00	54.65	25.20	3.88	33.00	Peak	---	---
2	1500.000	29.41	-20.59	50.00	33.33	25.20	3.88	33.00	Average	---	---
3	1660.000	52.62	-17.38	70.00	55.61	25.97	3.94	32.90	Peak	---	---
4	1660.000	29.80	-20.20	50.00	32.79	25.97	3.94	32.90	Average	---	---
5	1862.000	50.52	-19.48	70.00	52.37	26.89	4.02	32.76	Peak	---	---
6	1862.000	31.89	-18.11	50.00	33.74	26.89	4.02	32.76	Average	---	---

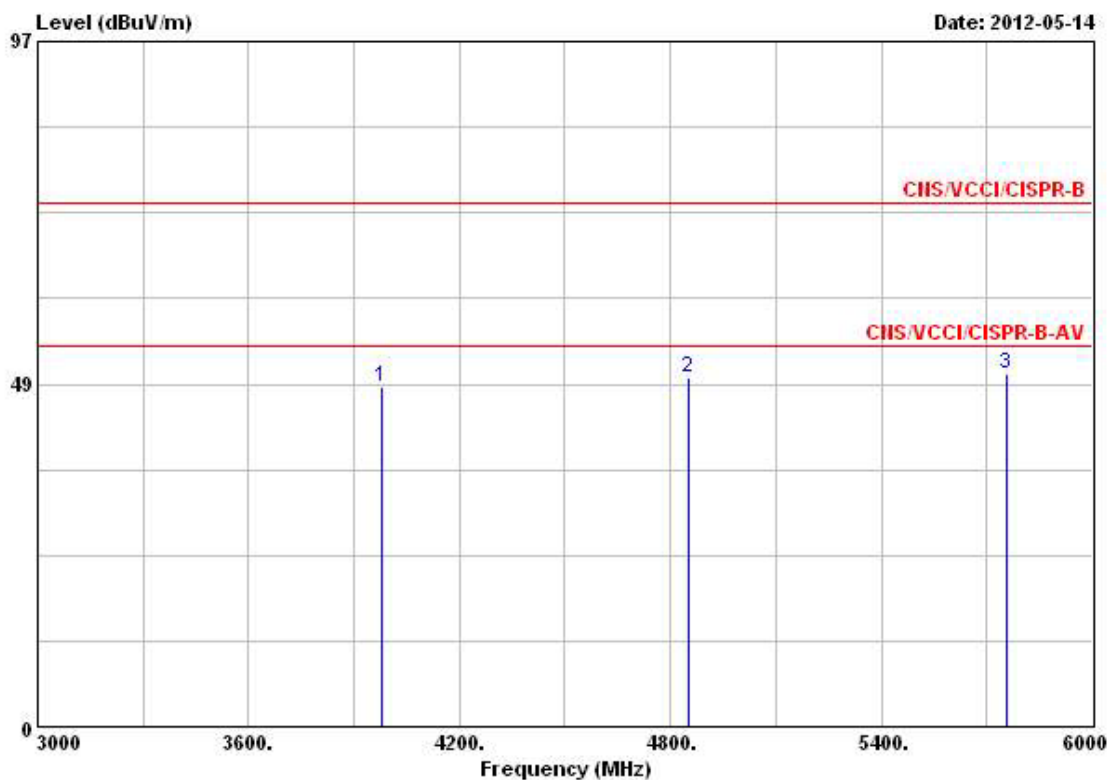


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3981.000	48.16	-25.84	74.00	42.85	32.45	5.51	32.65 Peak	---	---
2	4854.000	49.50	-24.50	74.00	43.57	33.12	5.43	32.62 Peak	---	---
3	5754.000	50.01	-23.99	74.00	43.29	34.10	5.21	32.59 Peak	---	---



Vertical

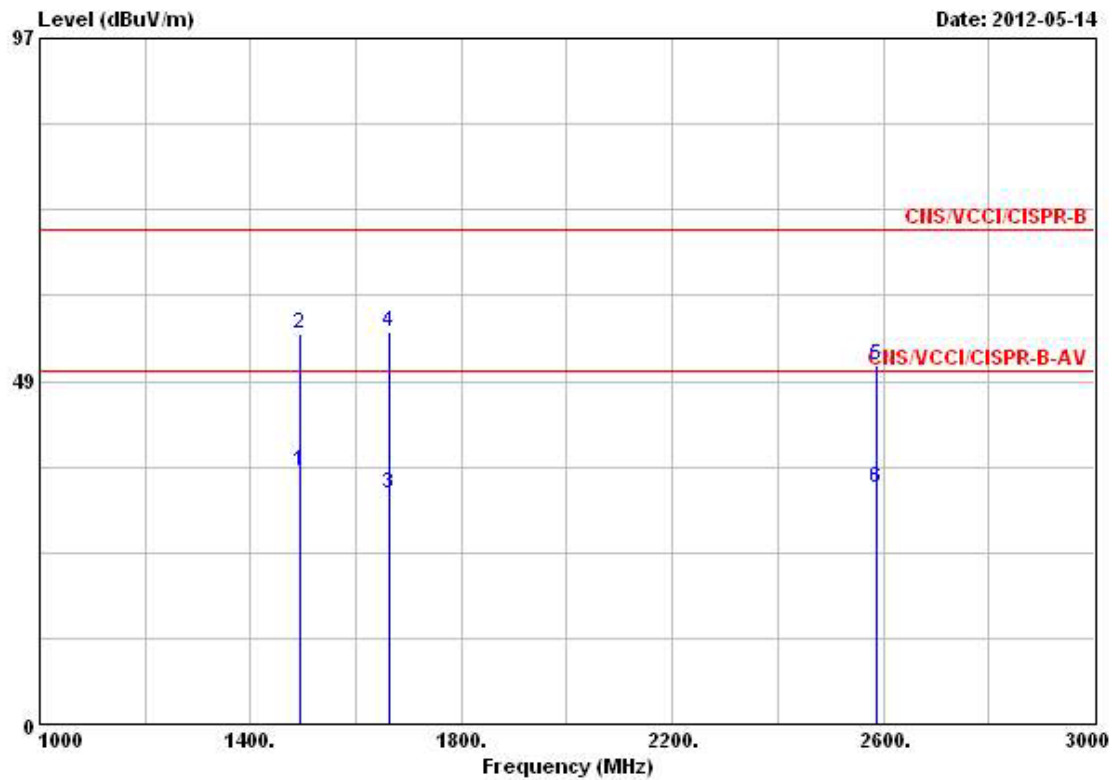

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	1494.000	35.77	-14.23	50.00	39.75	25.20	3.88	33.06	Average	100	210
2 @	1494.000	55.16	-14.84	70.00	59.14	25.20	3.88	33.06	Peak	---	---
3	1662.000	32.48	-17.52	50.00	35.47	25.97	3.94	32.90	Average	---	---
4 @	1662.000	55.53	-14.47	70.00	58.52	25.97	3.94	32.90	Peak	---	---
5	2588.000	50.73	-19.27	70.00	49.89	28.68	4.92	32.76	Peak	---	---
6 @	2588.000	33.45	-16.55	50.00	32.61	28.68	4.92	32.76	Average	---	---

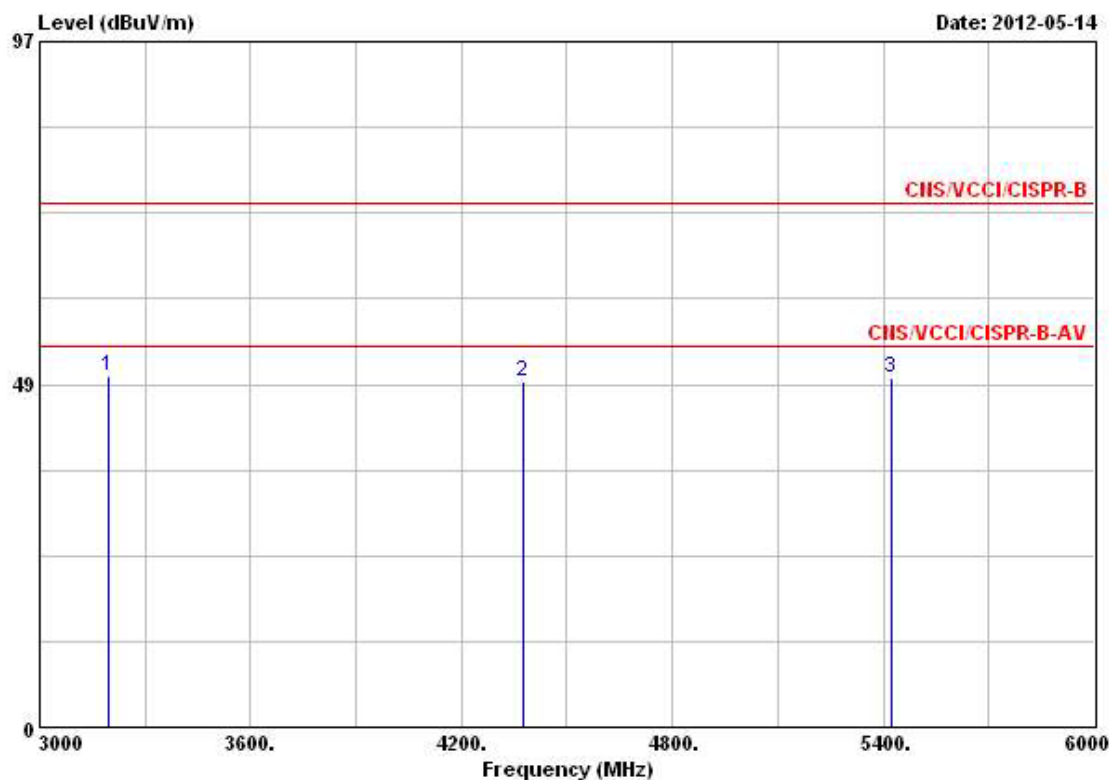

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3198.000	49.75	-24.25	74.00	46.65	30.48	5.42	32.80 Peak	---	---
2	4374.000	48.95	-25.05	74.00	43.71	32.43	5.49	32.68 Peak	---	---
3	5421.000	49.35	-24.65	74.00	42.65	33.90	5.36	32.56 Peak	---	---

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
V: Vertical Polarization ; H: Horizontal Polarization.

3.4 Harmonic Current Emissions Measurement

3.4.1 Limit

Harmonic current emissions evaluate the potential for the EUT to cause distortion on the AC power lines. It is applicable to electrical and electronic equipment having an input current ≤ 16 A per phase, and intended to be connected to public low-voltage distribution systems. EUT has been specified power less than or equal to 600 W and complies with Class D equipment and limits.

Class D Limits Table

Harmonic Order	Max. permissible harmonic current per watt (mA/W)	Max. permissible harmonic current (A)
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$13 \leq n \leq 39$	$3.85/n$	$0.15 \times 15/n$

3.4.2 Measuring Instruments and Setting

Please refer to section 5 of equipment's list in this report. The following table is the setting of harmonic Tester.


Harmonic and Flicker Tester	Setting
Line Voltage	230 V
Line Frequency	50 Hz
Device Class	A
Current Measurement Range	High
Measurement Delay	10.0 seconds
Test Duration	2.00 minutes

3.4.3 Test Procedures

The measurement of harmonic currents shall be performed as follows:

- for each harmonic order, measure the 1.5 s smoothed r.m.s. harmonic current in each DFT time window as defined in IEC 61000-4-7.
- calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period Short cyclic ($T_{cycle} \leq 2.5$ min). Because of synchronisation to meet the requirements for repeatability in 5%.

3.4.4 Test Setup Layout

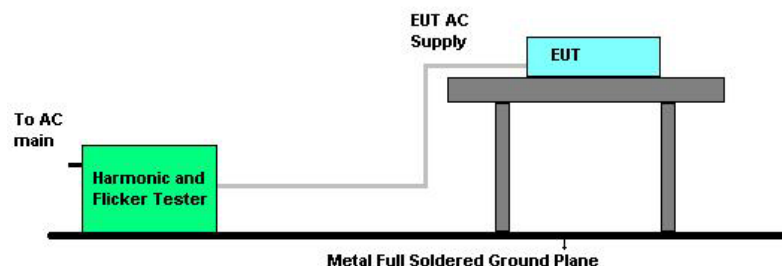

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 Results of Harmonic Current Emissions

The EUT power from host so there is no need to do this test.

3.5 Voltage Fluctuation and Flicker Measurement

3.5.1 Limit

The objective of voltage changes, voltage fluctuations and flicker in public low voltage supply systems during equipment with rated current ≤ 16 A per phase, ensures that home appliances and certain other electrical equipment do not adversely affect lighting equipment when connected to the same power system.

Voltage Fluctuation and Flicker Limits

- The value of P_{st} shall not be greater than 1.0.
- The value of P_{it} shall not be greater than 0.65.
- The value of $d(t)$ during a voltage change shall not exceed 3.3 % for more than 500 ms.
- The relative steady-state voltage change, d_c , shall not exceed 3.3 %.
- The maximum relative voltage change, d_{max} , shall not exceed 4.0 %.

3.5.2 Measuring Instruments and Setting


Please refer to section 5 of equipment's list in this report. The following table is the setting of the flicker tester.

Harmonic and Flicker Tester	Setting
Line Voltage	230 V
Line Frequency	50 Hz
Measurement Delay	10.0 seconds
Pst Integration Time	10 minutes
Pst Integration Periods	1

3.5.3 Test Procedures

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure

3.5.4 Test Setup Layout

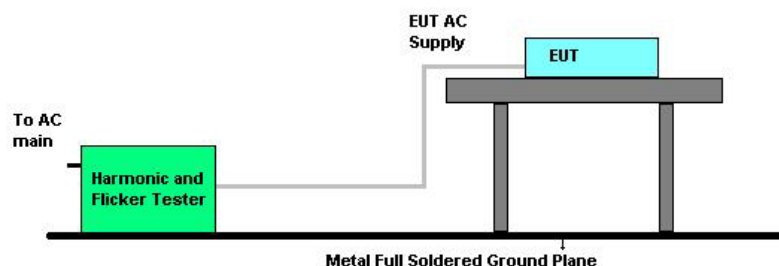

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 Test Result of Voltage Fluctuation and Flicker

The EUT power from host so there is no need to do this test.

4 IMMUNITY TESTS RESULT

4.1 Electrostatic Discharge Immunity Measurement (ESD)

4.1.1 Limit

Air discharges and contact charges are estimated to enclosure of EUT on all connectors and conducting surfaces.

Contact Discharges to the conductive surfaces and to coupling planes:

The EUT shall be exposed to at least 20 discharges 10 each at negative and positive polarity. One of the test points shall be subjected to at least 50 indirect discharges (contact) to the center of the front edge of the horizontal coupling plane(HCP). The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode [see IEC 61000-4-2 for use of the Vertical Conducting Plane (VCP)]. Tests shall be performed at a maximum repetition rate of one discharge per second.

Air Discharge at seam between apertures and insulation surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. This investigation should be restricted to those areas normally handled by the user. A minimum of 10 single air discharges of each polarity and test level shall be applied to the selected test point for each area.

The preferential range of test levels for the ESD test is given in following levels:

Contact discharge Test voltage ± 4 kV ; Air discharge Test voltage ± 8 kV.

4.1.2 Measuring Instruments and Setting

Please refer to section 5 of equipment's list in this report. The following table is the setting of the electrostatic discharge simulator.


Electrostatic Discharge Simulator	Discharge Setting
Contact Charge Voltage	± 2 / ± 4 kV
Air Charge Voltage	± 2 / ± 4 / ± 6 / ± 8 kV
Rise Time	5nS + 30%
Half-Value width	30nS + 30%
Polarity	Positive/Negative
Single Discharge Mode	1 discharge per 1s

4.1.3 Test Procedures

1. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
2. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
3. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
4. The test shall be performed with both air discharge and contact discharge. On preselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On preselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
5. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

6. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
7. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
8. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

4.1.4 Test Setup

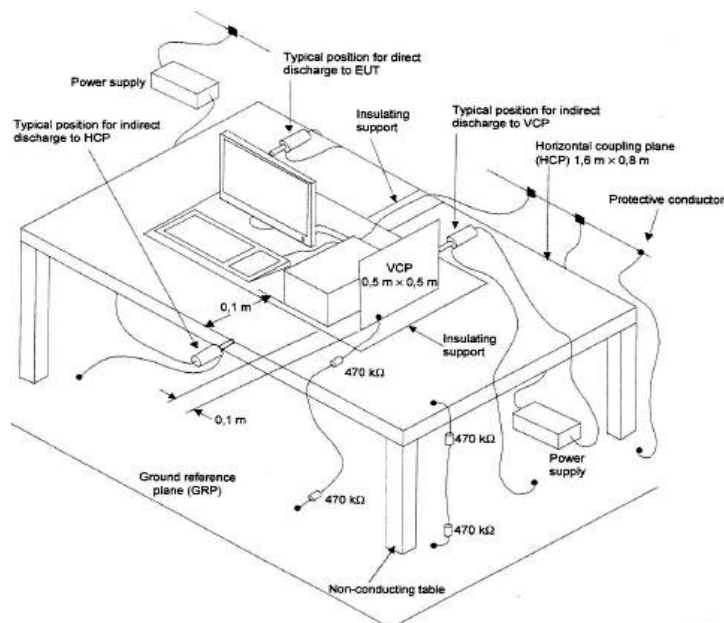

setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner :

- a. CONTACT DISCHARGE to the conductive surfaces and to coupling plane;
- b. AIR DISCHARGE at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.



4.1.5 Test Result of Electrostatic Discharge Immunity

Final Test Date	Apr. 10, 2012	Test Site	ES01-HY
Temperature	24 °C	Humidity	48%
Pressure	101 kPa	Test Engineer	Mars
Discharge Mode	Contact Discharge	Test Voltage	±2 / ±4 kV
Tested No.	10 single	Configuration	System Mode
Performance	Required Criteria B		

Test Point	Observation	Criteria
HCP / VCP (At front, left, right, rear)	When testing the contact discharge at ±4 kV on EUT, the function is self-recoverable.	B

Note: In the Air Discharge tested the EUT has no on slots, apertures, or insulating surfaces. So, the air discharge test is not applicable.

4.2 Radio Frequency Electromagnetic Field Immunity Measurement (RS)

4.2.1 Limit

Most electronic equipment is in some manner affected by electromagnetic radiation. RF immunity test entails subjecting the equipment under test to a uniform field of radiated electromagnetic energy of a specified electromagnetic field strength and frequency and monitoring the functionality of the device as the frequency is swept over a specified frequency range.

The preferential range of test field strength levels for the RS test is given in following levels:
80~1GHz 3V/m; 1.4~2.7GHz: 3V/m.

4.2.2 Exclusion Bands

Using the 2,450 MHz band as an example:

- lower limit of exclusion band = $2400 - 120 = 2280$ MHz;
- upper limit of exclusion band = $2483,5 + 124,175 = 2607,675$ MHz;
- thus the exclusion band for 2,45 GHz equipment falling within the scope of the present document extends from 2280 MHz to 2607,675 MHz.

4.2.3 Measuring Instruments and Setting


Please refer to section 5 of equipment's list in this report. The following table is the setting of the RS Immunity Test System.

RS Immunity Test System	Setting
Method Used	Bilog antenna and Horn antenna
Field Strength Exposure	3 V/m (measured un-modulated carrier)
Frequency Range/Modulation	80 MHz to 1000 MHz and 1400 MHz to 2700 MHz, 80% A Mmodulation
Antenna Polarization	Vertical & Horizontal
Test Distance	3m
Frequency Steps	1% step
Dwell Time	2.9 sec
Exposures	Front, Back, Left and Right of the EUT

4.2.4 Test Procedures

1. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
2. The bilog antenna which is enabling the complete frequency range of 80 MHz to 1000 MHz and 1400 MHz to 2700 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
3. The test is normally performed with the generating antenna facing each of four sides of the EUT. The polarization of the field generated by the bi-conical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
4. At each of the above conditions, the frequency range is swept 80 MHz to 1000 MHz and 1400 MHz to 2700 MHz pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

4.2.5 Test Setup Layout

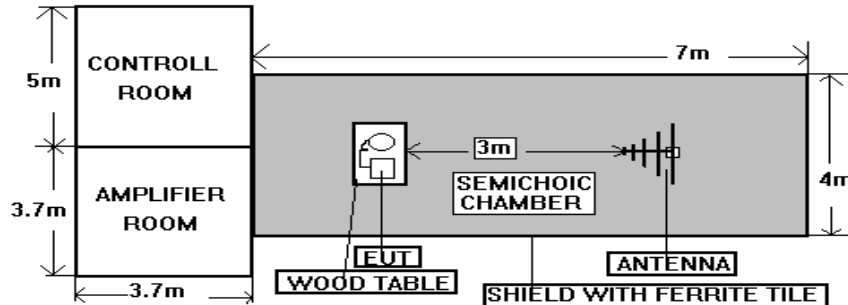

NOTE : The SPORTON 7m x 4m x 4m semicoic chamber is compliance with the sixteen points uniform field requirement as stated in IEC 61000-4-3 Section 6.2.

The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field) conditions may require significant antenna drive power and the resultant high field strength levels. To comply with local regulations and to prevent biological hazards to the testing personnel, it is recommended that these tests be carried out in a shielded enclosure or semicoic chamber.



4.2.6 Test Result of Radio Frequency Electromagnetic Field Immunity

Final Test Date	Apr. 10, 2012	Test Site	RS01-HY
Temperature	24℃	Humidity	48%
Pressure	101 kPa	Test Engineer	Mars
Performance	Required Criteria A	Configuration	System Mode

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Performance
80 ~ 1000	V&H	0	3	A
80 ~ 1000	V&H	90	3	A
80 ~ 1000	V&H	180	3	A
80 ~ 1000	V&H	270	3	A
1400 ~ 2700	V&H	0	3	A
1400 ~ 2700	V&H	90	3	A
1400 ~ 2700	V&H	180	3	A
1400 ~ 2700	V&H	270	3	A

4.3 Electrical Fast Transient/Burst Immunity Measurement (EFT)

4.3.1 Limit

This test interference signal injects to the AC/DC power supply and signal I/O lines of the EUT.

Test on Power Line:

The EFT/B-generator was located on the GRP. The length from the EFT/B-generator to the EUT as not exceeds 1 m.

The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.

The preferential range of test peak voltage levels for the EFT test is given in following levels:

Power Line: $\pm 1\text{kV}$.

4.3.2 Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the EMC Test Station.

EMC Test Station (EFT)	Setting
Test Voltage	Power Line: $\pm 1\text{kV}$
Polarity	Positive/Negative
Impulse Frequency	5 kHz
Impulse Wave shape (T_r/T_h)	5/50 ns
Burst Duration	15 ms

4.3.3 Test Procedures

1. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
ambient temperature: 15°C to 35°C ;
relative humidity : 10% to 75%;
atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
2. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
3. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
4. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria:
 - Normal performance within the specification limits.
 - Temporary degradation or loss of function or performance which is self-recoverable.
 - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - Degradation or loss of function which is not recoverable due to damage of equipment (components).

4.3.4 Test Setup Layout

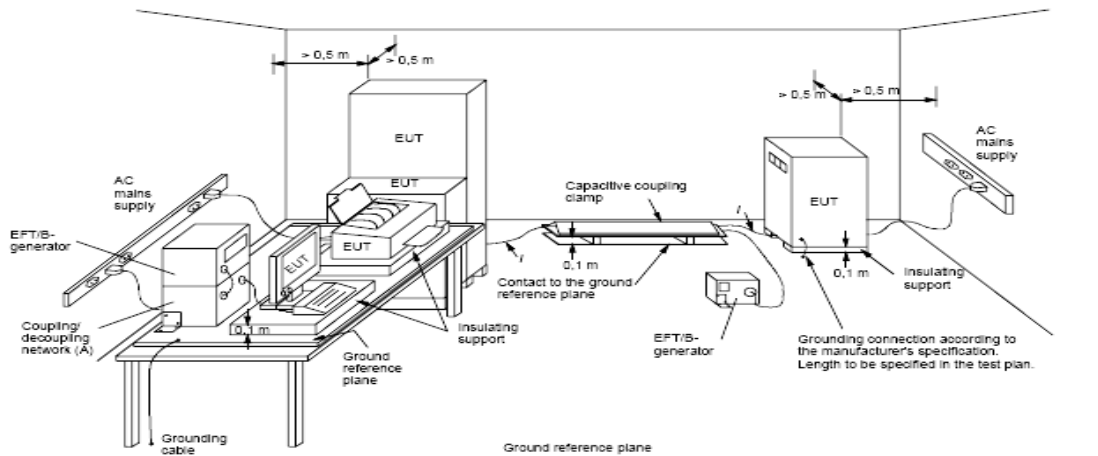

Key

- l length between clamp and the EUT to be tested (should be $0.5 \text{ m} \pm 0.05 \text{ m}$)
- (A) location for supply line coupling
- (B) location for signal lines coupling

IEC 901/04

The EUT was placed on a ground reference plane and was insulated from it by an insulating support about 0.1m thick. If the EUT is table-top equipment, it was located approximately 0.8m above the GRP. The GRP. Was a metallic sheet of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. It shall project beyond the EUT by at least 0.1m on all sides and connected to the protective earth. In the SPORTON EMC LAB. We provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system. The EUT was arranged and connected according to its functional requirements. The minimum distance between the EUT and other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. using the coupling clamp, the minimum distance between the coupling plates and all other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. The length of the signal and power lines between the coupling device and the EUT was 1m or less.

4.3.5 Test Deviation

There is no deviation with the original standard.

4.3.6 Test Result of Electrical Fast Transient/Burst Immunity

The EUT power from host so there is no need to do this test.

4.4 Surge Immunity Measurement (Surge)

4.4.1 Limit

This test simulates a lightning event by inducing transients onto the AC/DC power supply lines in common and differential mode.

Each device was tested in a total of two surge Configuration:

Line to Ground (L-G): Combination Wave, Line to Protective Earth with 9uF and 10Ohm and Neutral to Protective Earth with 9uF and 10Ohm, common mode, generator earthed.

Line-to-Line (L-L): Combination Wave, Line to Neutral with 18uF, differential mode, generator floated.

The preferential range of test peak voltage levels for the Surge test is given in following levels:

AC/DC power Line: Line to line: $\pm 1\text{kV}$; Line to ground: $\pm 2\text{kV}$.

4.4.2 Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the EMC Test Station.

EMC Test Station (Surge)	Setting
Combination Wave Shape	1.2/50us Open Circuit Voltage; 8/20us Short Circuit Current
Power Line Test Voltage	Line to line $\pm 1\text{kV}$; Line to ground $\pm 2\text{kV}$
Polarity	Positive/Negative
Phase Angle	$0^\circ / 90^\circ / 180^\circ / 270^\circ$
Pulse Repetition Rate	1 time / min. (maximum)
Number of Tests	5 positive and 5 negative at selected points


4.4.3 Test Procedures

- The climatic conditions shall comply with the following requirements :
 - ambient temperature : 15°C to 35°C
 - relative humidity : 10 % to 75 %
 - atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mbar)
- Electromagnetic conditions, the electromagnetic environment of the laboratory shall not influence the test results.
- The test shall be performed according the test plan that shall specify the test set-up with
 - generator and other equipment utilized;
 - test level (voltage/current);
 - generator source impedance;
 - internal or external generator trigger;
 - number of tests: at least five positive and five negative at the selected points;
 - repetition rate: maximum 1/min.
 - inputs and outputs to be tested;
 - representative operating conditions of the EUT;
 - sequence of application of the surge to the circuit;
 - phase angle in the case of AC power supply;
 - actual installation conditions, for example :
 - AC : neutral earthed,
 - DC : (+) or (-) earthed to simulated the actual earth conditions.
- If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero crossing and the peak value of the a.c. voltage wave (positive and negative).
- The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage

breakdown level (let-through level) of the primary protection.

8. If the actual operating signal sources are not available, they may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to the test plan.
9. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used and the protection devices shall be replaced.

4.4.4 Test Setup Layout

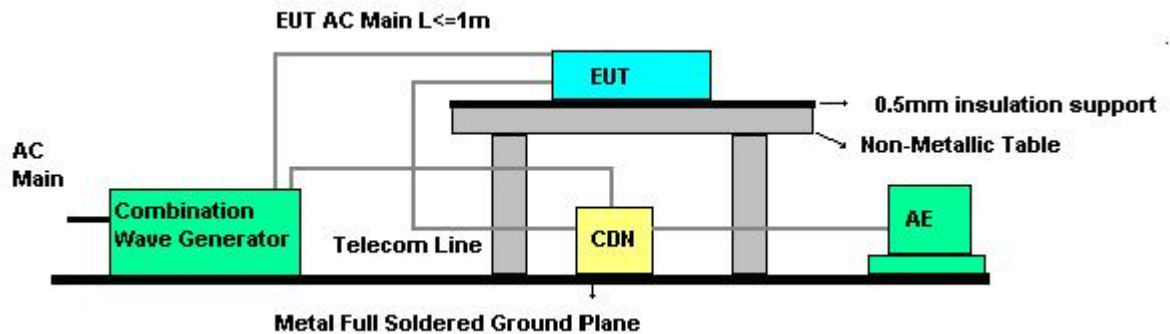

4.4.5 Test Deviation

There is no deviation with the original standard.

4.4.6 Test Result of Surge Immunity

The EUT power from host so there is no need to do this test.

4.5 Conducted Disturbances Induced by RF Field Immunity Measurement (CS)

4.5.1 Limit

Injected the conducted disturbances directly into AC/DC power and signal I/O cables.
The preferential range of test field strength levels for the CS test is given in following levels:
150kHz~80MHz: 3Vrms.


4.5.2 Measuring Instruments and Setting

CS Immunity Test System	Setting
Method Used	CDN-M3
Field Strength Exposure	3Vrms
Frequency Range/Modulation	150kHz~80MHz, 80% AM modulation
Frequency Steps	1% step
Dwell Time	2.9 sec

4.5.3 Test Procedures

1. This test method test can be performed without using a self-shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
2. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50-ohm load resistor.
3. The frequency range is swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. where the frequency is swept incrementally; the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
4. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequencies and harmonics or frequencies of dominant interest shall be analyzed separately.
5. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.

4.5.4 Test Setup Layout

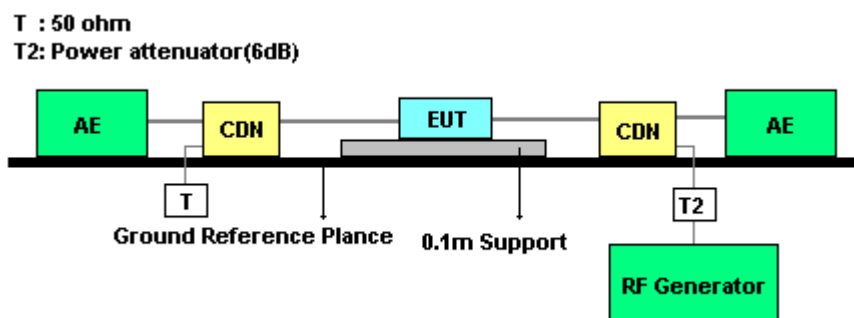

4.5.5 Test Deviation

There is no deviation with the original standard.

4.5.6 Test Result of Conducted Disturbances Induced by RF Field Immunity

The EUT power from host so there is no need to do this test.

4.6 Voltage Dips and Voltage Interruption Immunity Measurement (DIP)

4.6.1 Limit

Voltage failures occur following switching operations, short-circuits, response of fuses and when running up heavy loads. The following table is the limits of the dips and Interruption Immunity Test.

Voltage Reduction	Periods	Performance Criterion
0%	5000 ms	C
0%	10/20 ms	B
70%	500 ms	C

4.6.2 Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the EMC Test Station.

EMC Test Station (Dip Interruption)	Setting
Voltage Reduction (Periods)	0% (10/20 ms); 70% (500 ms); 0% (5000 ms)
Test Interval	10 sec for each event

4.6.3 Test Procedures

- The climatic conditions shall comply with the following requirements :
 - ambient temperature : 15 °C to 35 °C
 - relative humidity : 10 % to 75 %
 - atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mba)
- The EUT is powered up to a nominal voltage of 240VAC/50Hz & 100VAC/50Hz, and then software-controlled voltage dips and interruptions are introduced.

4.6.4 Test Setup Layout

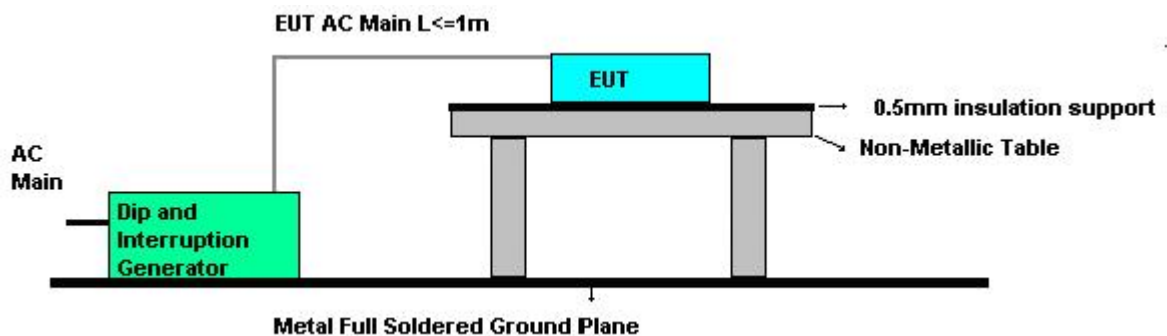

4.6.5 Test Deviation

There is no deviation with the original standard.

4.6.6 Test Result of Voltage Dips and Voltage Interruption Immunity

The EUT power from host so there is no need to do this test.



5 LIST OF MEASURING EQUIPMENTS

< EMI >

< Conducted Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz ~ 2.75GHz	Feb. 08, 2012	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz ~ 30MHz	Jan. 12, 2012	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz ~ 30MHz	Feb. 20, 2012	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz ~ 30MHz	Mar. 02, 2012	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

< Radiated Emission below 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-10M	10CH01-HY	30MHz ~ 1GHz 10m / 3m	Apr. 10, 2012	Radiation (10CH01-HY)
Spectrum Analyzer	R&S	FSP7	838858/013	9kHz ~ 7GHz	Feb. 22, 2012	Radiation (10CH01-HY)
Spectrum Analyzer	R&S	FSP7	10644/007	9kHz ~ 7GHz	Aug. 23, 2011	Radiation (10CH01-HY)
Receiver	R&S	ESC30	100358	9kHz ~ 2.75GHz	Mar. 16, 2012	Radiation (10CH01-HY)
Amplifier	Agilent	8447D	2944A10825	100kHz ~ 1.3GHz	Mar. 30, 2012	Radiation (10CH01-HY)
Amplifier	Agilent	8447D	2944A10826	100kHz ~ 1.3GHz	Apr. 18, 2012	Radiation (10CH01-HY)
Biconical Antenna	Schwarz beck	VHBB 9124	286	30MHz ~ 200MHz	Aug. 04, 2011	Radiation (10CH01-HY)
Log Antenna	Schwarz beck	VUSLP 9111	206	200MHz ~ 1GHz	Aug. 04, 2011	Radiation (10CH01-HY)
Turn Table	HD	DT 60 RPS	1513/004/00	0 ~ 360 degree	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/556/00	1 ~ 4 m	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/559/00	1 ~ 4 m	N/A	Radiation (10CH01-HY)
RF Cable-R10m	BELDEN	RG8/U	CB023-INSIDE	30MHz ~ 1GHz	Nov. 16, 2011	Radiation (10CH01-HY)
RF Cable-R10m	Suhner Switzerland + Rosenberger	RG223/U + UAA220A-0	CB022-DOOR	30MHz ~ 1GHz	Nov. 16, 2011	Radiation (10CH01-HY)

Note: Calibration Interval of instruments listed above is one year.



< Radiated Emission above 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 6 GHz 3m	Dec. 12, 2011	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 08, 2011	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 30, 2011	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 18, 2012	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)
Receiver	R&S	ESI	838496/008	20Hz ~ 7GHz	Apr. 24, 2011	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

< EMS >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
ESD Simulator	KEYTEK	MZ-15/EC	0302234	Air: 0 ~ 15 kV Contact: 0 ~ 8 kV	Aug. 26, 2011	ESD

Note: Calibration Interval of instruments listed above is one year.

< RS > -- to 1G test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Probe	ETS-LINDGREN	HI-6005	00052473	0.1MHz ~ 5GHz	Sep. 02, 2011	RS
Amplifier	AR	250W 1000AM1	320482	80MHz ~ 1GHz	Oct. 12, 2011	RS
DUAL DIRECTIONAL COUPLER	AMPLIFIER& RESEARCH	DC7144A	312782	80 ~ 1GHz	Oct. 12, 2011	RS
INTEGRATED MEASUREMENT SYSTEM	ROHDE& SCHWARZ	IMS	100007	9kHz ~ 3GHz	Mar. 15, 2012	RS
NRP-Z91 POWER SENSOR 6GHZ	ROHDE& SCHWARZ	NRP-Z91 1168.8004.02	100095	9kHz ~ 3GHz	Mar. 15, 2012	RS
Antenna	FRANKONIA	BTA-L	02002L	26MHz ~ 1GHz	May 03, 2011	RS

Note: Calibration Interval of instruments listed above is one year.

< RS > -- to 3G test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	AMPLIFIER& RESEARCH	30S1G3	312505	800M ~ 3GHz	Oct. 12, 2011	RS
DUAL DIRECTIONAL COUPLER	AMPLIFIER& RESEARCH	DC6180A	312453	0.8 ~ 4.2GHz	Oct. 12, 2011	RS
Antenna	AR	AT4002A	312601	800MHz ~ 5GHz	May 03, 2011	RS
INTEGRATED MEASUREMENT SYSTEM	ROHDE& SCHWARZ	IMS	100007	9kHz ~ 3GHz	Mar. 15, 2012	RS
NRP-Z91 POWER SENSOR 6GHZ	ROHDE& SCHWARZ	NRP-Z91 1168.8004.02	100095	9kHz ~ 3GHz	Mar. 15, 2012	RS

Note: Calibration Interval of instruments listed above is one year.



6 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7 TAF CERTIFICATE OF ACCREDITATION


財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate No. : L1190-111208

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 08, 2011

P1, total 24 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Test Photos

1 Photographs of Conducted Emissions Test Configuration

FRONT VIEW



REAR VIEW



SIDE VIEW



2 Photographs of Radiated Emission Test Configuration

Below 1GHz

FRONT VIEW




REAR VIEW





From 1GHz to 6GHz

FRONT VIEW

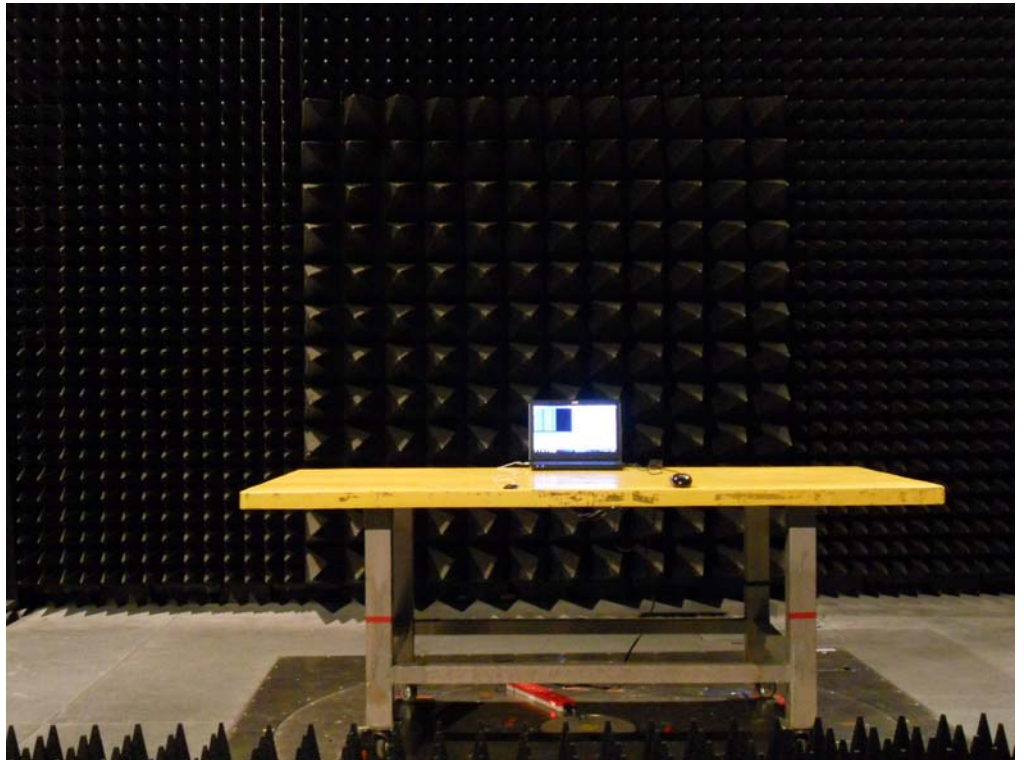

REAR VIEW



3 Photographs of ESD Immunity Test Configuration

FRONT VIEW



REAR VIEW



4 Photographs of RS Immunity Test Configuration



FRONT VIEW






REAR VIEW




APPENDIX B. Photographs of EUT

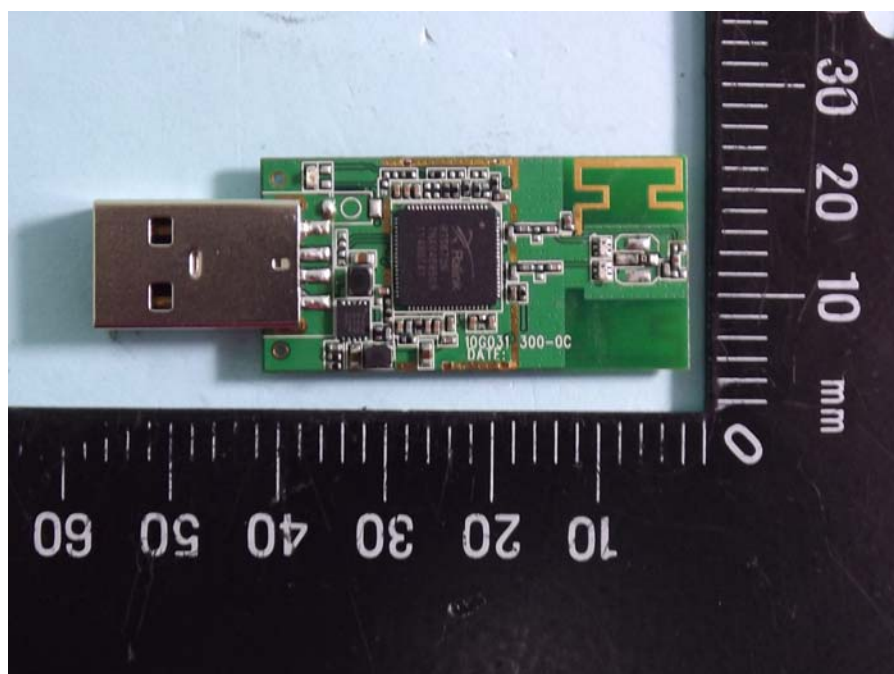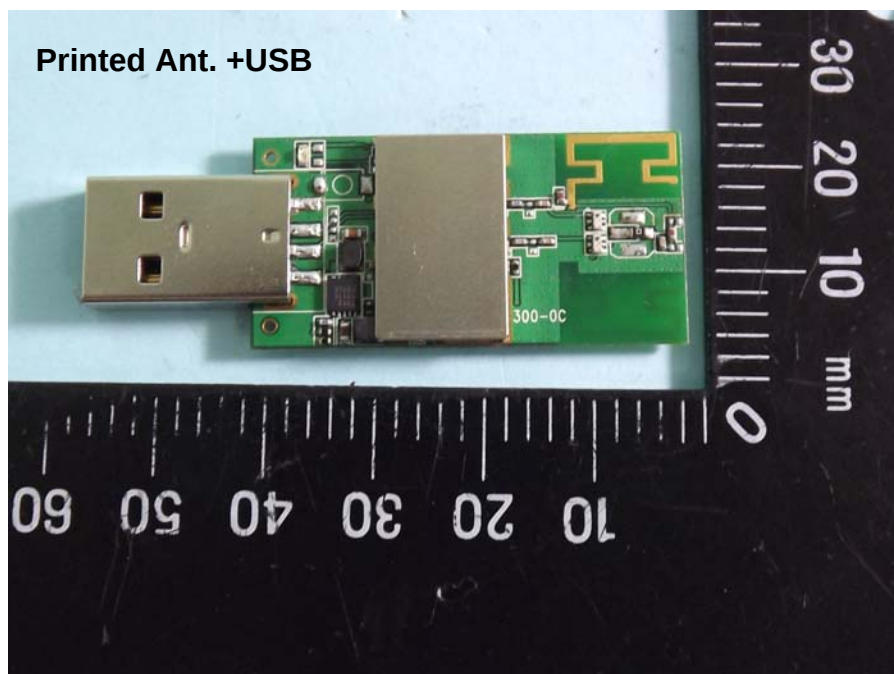


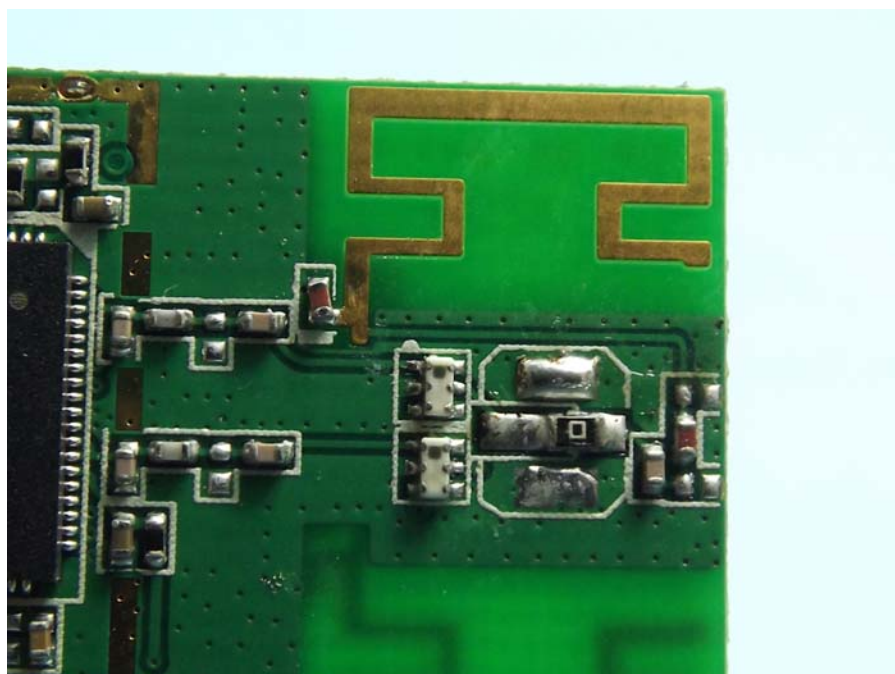


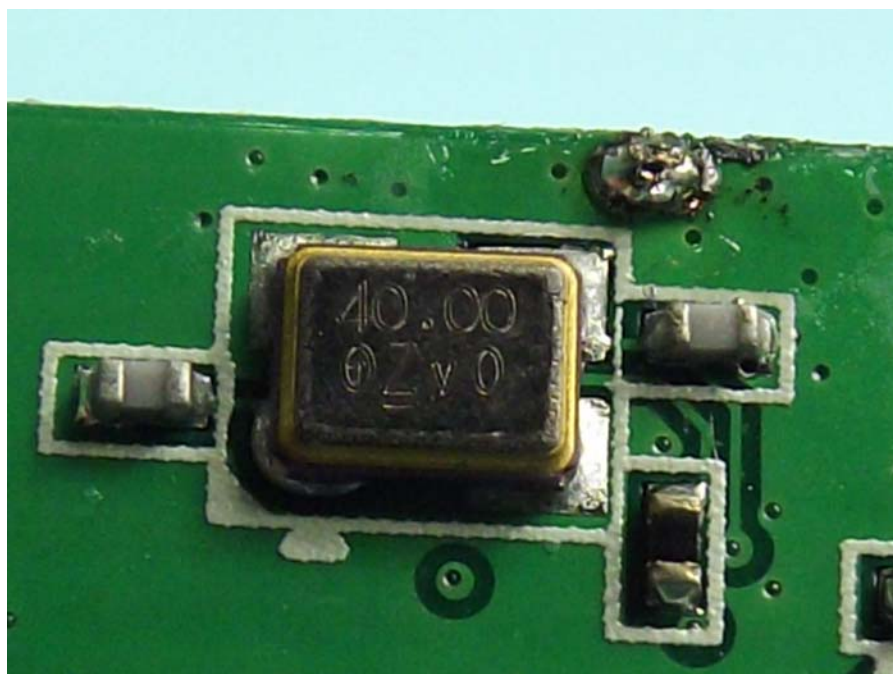
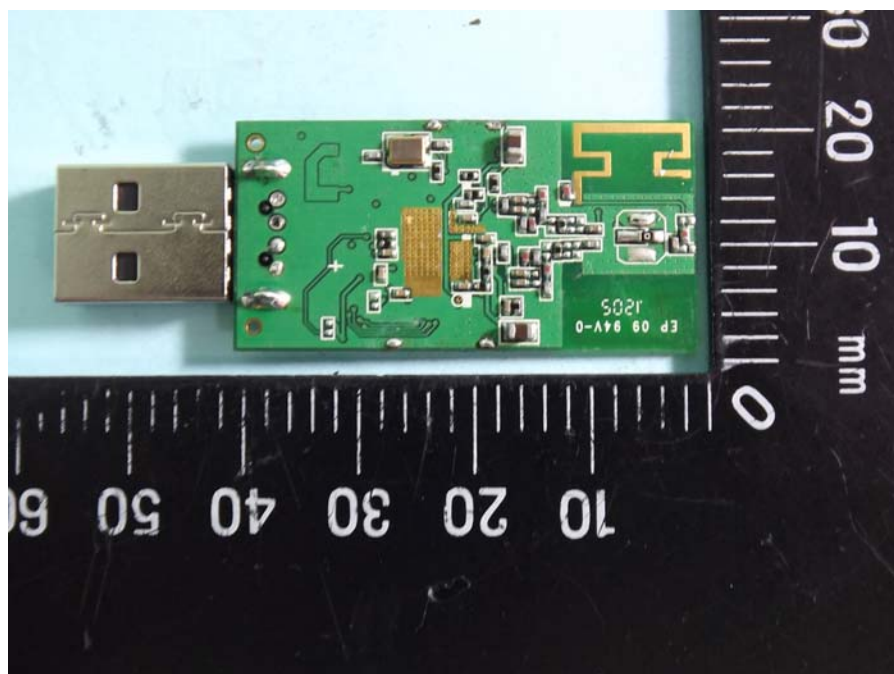



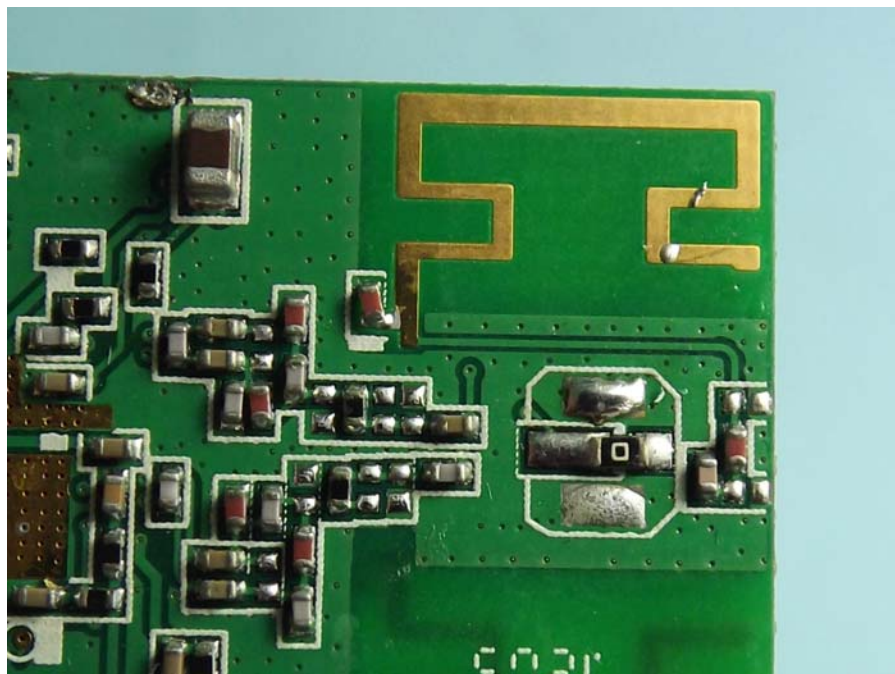


Printed Ant. +4pin pin-header

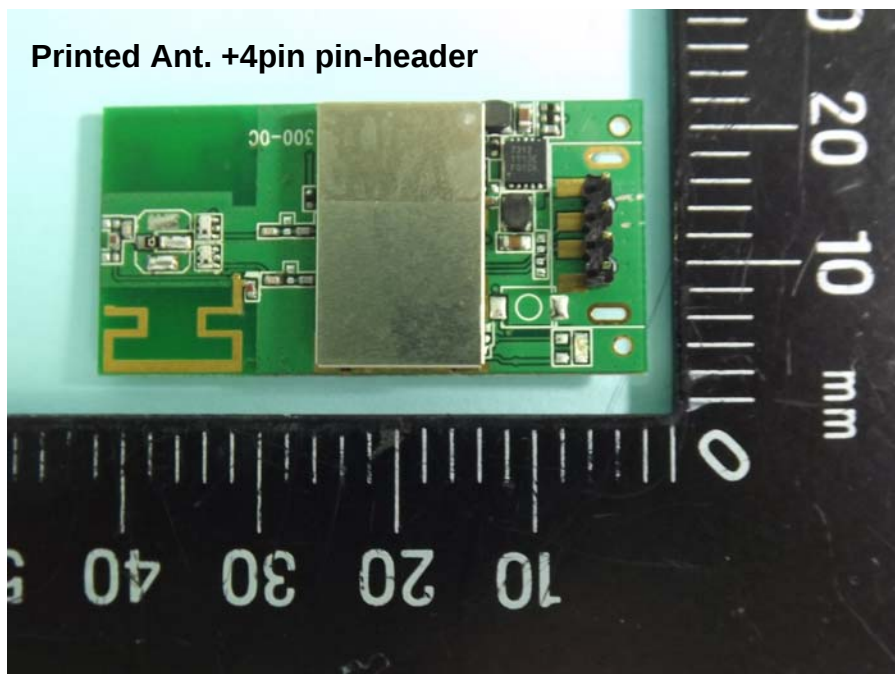

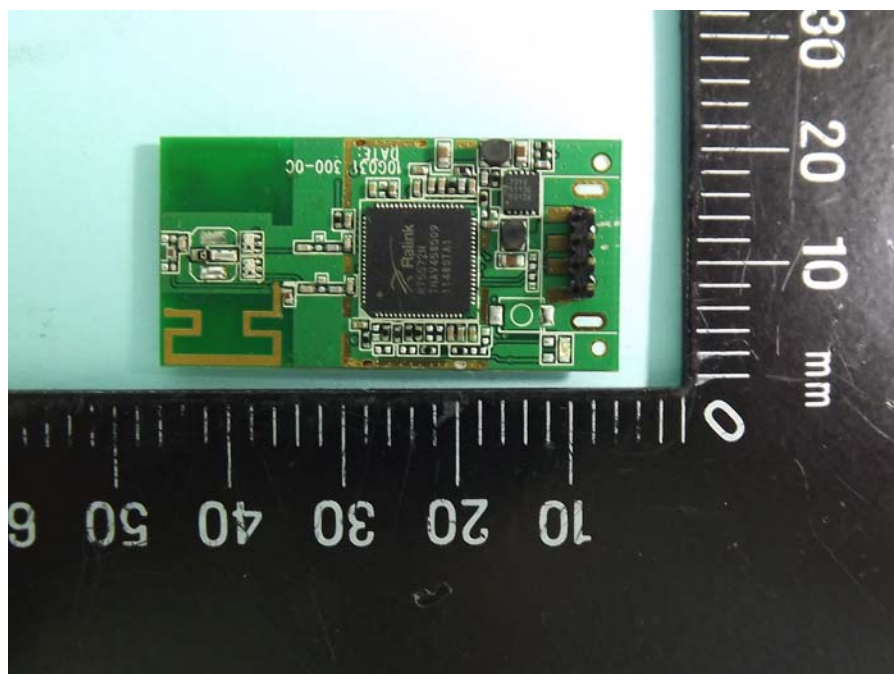

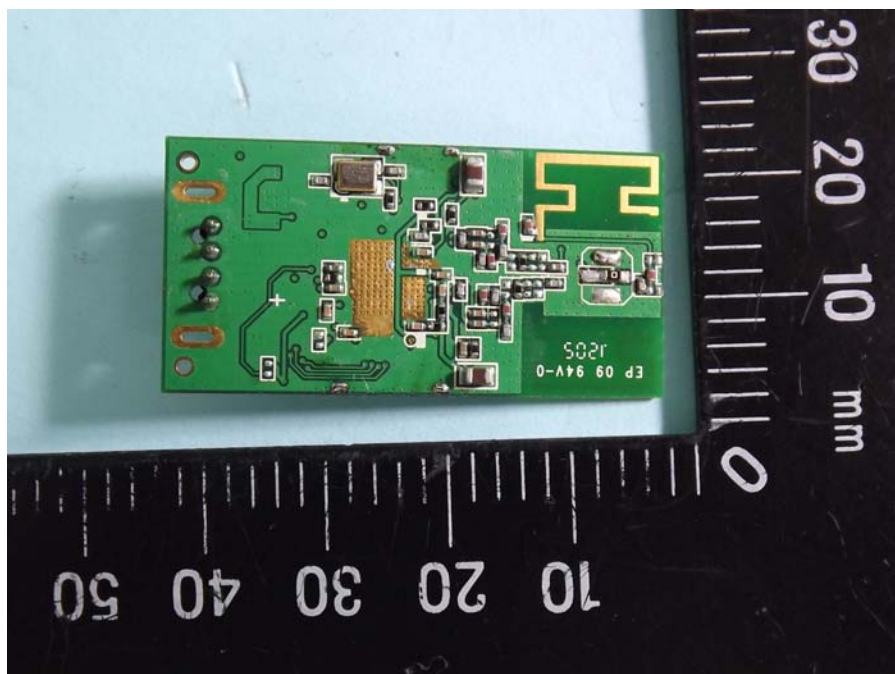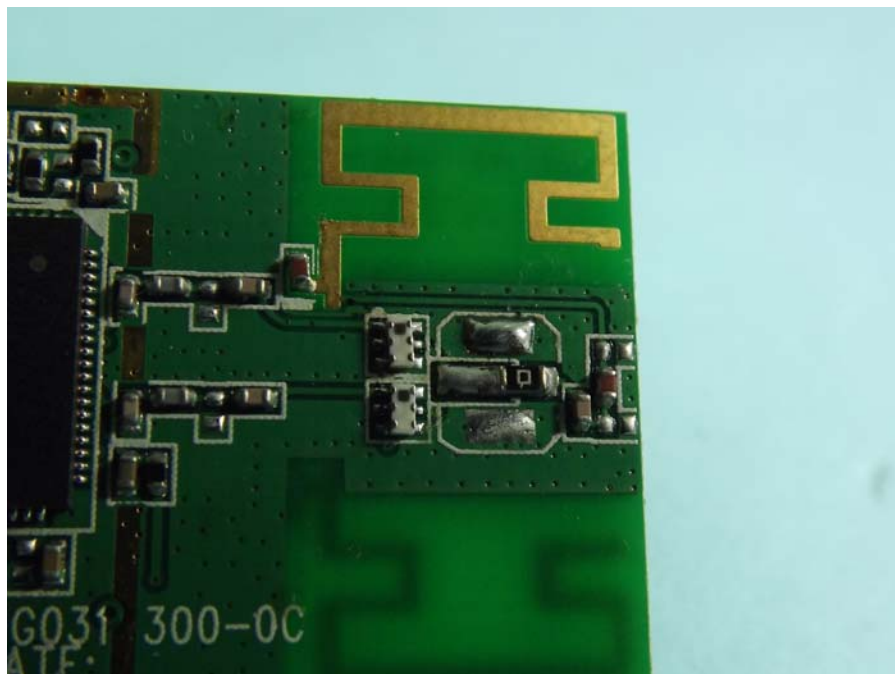

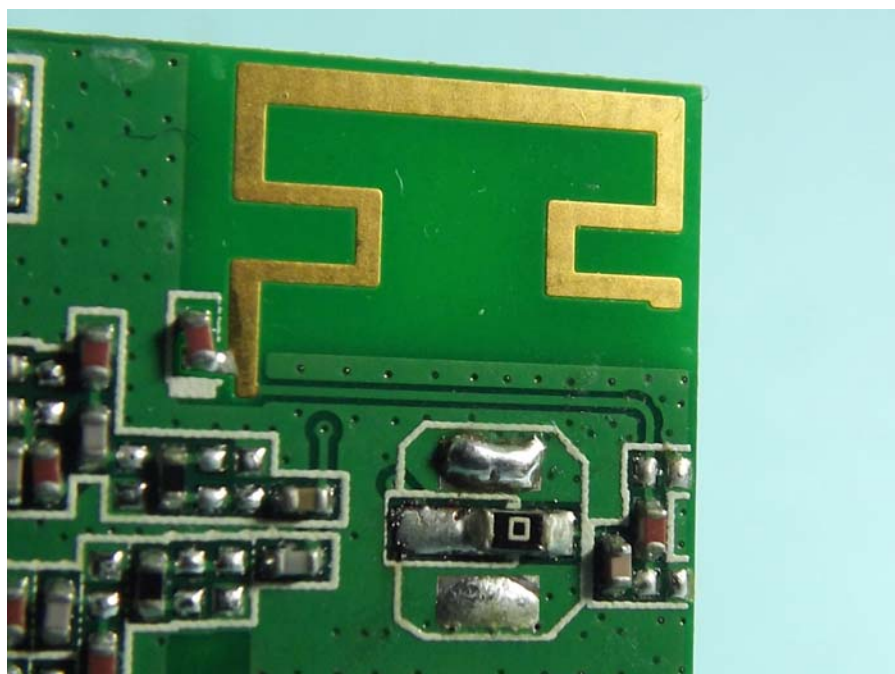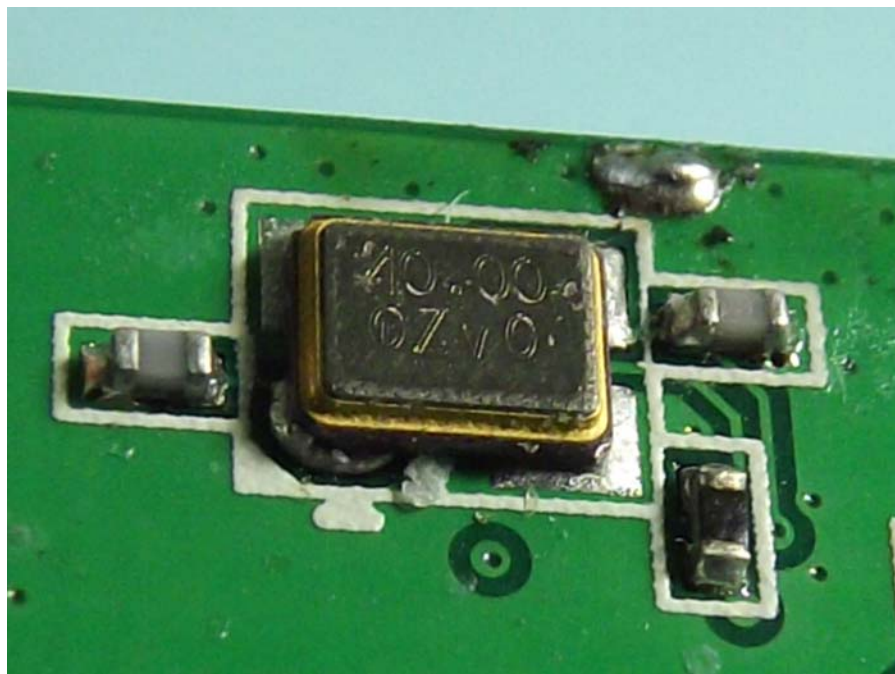

Printed Ant. +4pin wafer con

